



Light Commercial & Residential MULTI-SPLIT

- M-002 Multi-split Overview
- M-004 Multi-split Outdoor Units Lineup
- M-006 2-unit to 8-unit Multi-split Connectable Indoor Units
- M-010 Simultaneous Multi-split Connectable Indoor Units
- M-048 Feature Summary




Refrigerant type R32 models

- M-012 2-unit to 5-unit Multi-split
- M-018 Simultaneous Multi-split Twin/Triple
-
- M-022 2-unit to 5-unit Multi-split Indoor Units Specifications
-
- M-026 2-unit to 5-unit Multi-split Combination Table



Refrigerant type R410A models

- 6-unit to 8-unit Multi-split**
- M-014 6-unit Multi-split
- M-016 8-unit Multi-split
- Simultaneous Multi-split**
- M-020 Simultaneous Multi-split Twin/Triple/Double Twin
-
- M-024 6-unit to 8-unit Multi-split Indoor Units Specifications
-
- M-036 6-unit to 8-unit Multi-split Combination Table

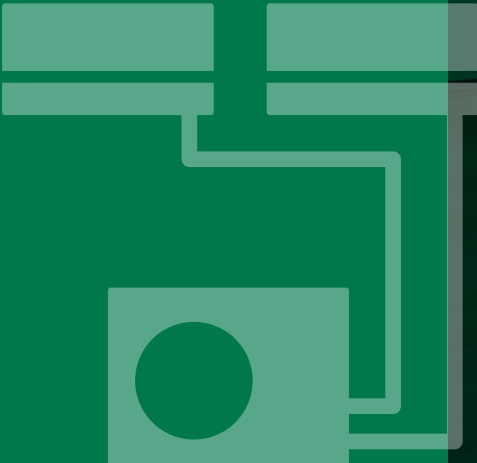

Control several indoor units with one outdoor unit. Build the system you desire.

If you want to keep a large floor as well as many rooms comfortable, we recommend to use our Multi-split to build a compact system using just one outdoor unit. Choose from a large lineup of indoor units, which match up well to your rooms. You can mix and match them as you like. Build the system that is just right for you.

Multi-split Overview

Space-saving Multi-split outdoor units can connect up to 8 indoor units in multiple rooms. New refrigerant R32 models are additionally added. Multi-split type can be introduced in various situations like in homes, in offices and stores to provide environment-friendly comfort.



NEW 3-unit, 4-unit, 5-unit Multi-split



3-unit 18/24 class



4-unit 30 class
5-unit 36 class

2-unit Multi-split



14 class



18 class

6-unit, 8-unit Multi-split



6-unit 45 class



8-unit 45 class

2-unit to 8-unit Multi-split

2-unit to 8-unit Multi-split types units are recommended for situations that require air conditioning in multiple rooms such as in family house or offices. Between 2 to 8 indoor units can be connected and individually operated. A variation of individual and central remote controller are available for operation control, time scheduling of each room and energy savings. Due to space-saving outdoor unit enables installation on balcony or under a waist-high window.

Twin/Triple



Twin 36 class
(Single phase/3 phase)



Twin/Triple 45/54 class
(Single phase/3 phase)



Twin/Triple/ Double Twin



72/90 class
(3 phase)











Simultaneous Multi-split

Simultaneous Multi-split type is recommended for situations where multiple indoor units need to be operated simultaneously such as for a small building, for small office building entrance, meeting room, educational facility hall, and other large spaces. Up to 4 indoor units can be operated simultaneously. This type is suitable for office spaces with large areas and properties with unusual floor layout.

Multi-split Outdoor Units Lineup



FUJITSU GENERAL (Euro) GmbH participates in the ECP program for VRF. Check ongoing validity of certificate: www.eurovent-certification.com *Models so marked are not ECC certified.

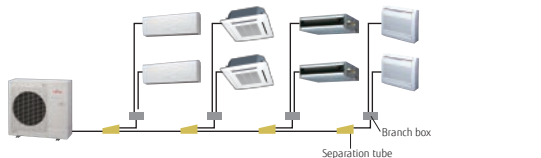				Class	14	18	18	24	30	36	45	54	72	90	
				Cooling rated capacity(kW)	4.0	5.0	5.4	6.8	8.0	10.0	12.5	14.0	14.0	19.0	22.0
2-unit, 3-unit, 4-unit, 5-unit Multi-split	2-unit Multi-split Up to 2 units			AOYG14KBTA2	AOYG18KBTA2										
	3-unit Multi-split Up to 3 units		 			AOYG18KBTA3	AOYG24KBTA3								
	4-unit Multi-split Up to 4 units		 					AOYG30KBTA4							
	5-unit Multi-split Up to 5 units		 						AOYG36KBTA5*1						
6-unit Multi-split	6-unit Multi-split Up to 6 units										AOYG45LBA6*				
8-unit Multi-split Up to 8 units												AOYG45LBT8*			
Simultaneous Multi-split	Twin Single phase									AOYG36KBTB	AOYG45KBTB				
	Twin 3 phase									AOYG36KRTA	AOYG45KRTA				
	Twin/Triple Single phase												AOYG54KBTB		
	Twin/Triple 3 phase												AOYG54KRTA		
	Twin/Triple/ Double Twin 3 phase													AOYG72LRLA	AOYG90LRLA

Note: 1. 2-unit Multi-split: Connectable indoor units are 2 units.
AOYG14KBTA2: Total capacity of indoor units connected must be between 4.0 kW and 6.0 kW.
AOYG18KBTA2: Total capacity of indoor units connected must be between 4.0 kW and 7.5 kW.

2. 3-unit Multi-split: Connectable indoor units are 2 to 3 units.
AOYG18KBTA3: Total capacity of indoor units connected must be between 4.0 kW and 8.5 kW.
AOYG24KBTA3: Total capacity of indoor units connected must be between 4.0 kW and 10.5 kW.

3. 4-unit Multi-split: Connectable indoor units are 2 to 4 units.
AOYG30KBTA4: Total capacity of indoor units connected must be between 7.5 kW and 14.0 kW.

4. 5-unit Multi-split: Connectable indoor units are 2 to 5 units.
AOYG36KBTA5: Total capacity of indoor units connected must be between 7.5 kW and 15.5 kW.

5. 6-unit Multi-split: Connectable indoor units are 2 to 6 units.
AOYG45LBA6: Total capacity of indoor units connected must be between 9.5 kW and 18.0 kW.


6. 8-unit Multi-split: Connectable indoor units are 2 to 8 units.
AOYG45LBT8: Total capacity of indoor units connected must be between 11.0 kW and 18.0 kW.

Cooling rated capacity: *1: 9.5kW

2-unit to 8-unit Multi-split Connectable Indoor Units



Type	2-unit		3-unit		4-unit	5-unit
Model name	AOYG14KBT2	AOYG18KBT2	AOYG18KBT3	AOYG24KBT3	AOYG30KBT4	AOYG36KBT5
Multi-split Type Outdoor Unit						
						
Capacity (kW)	Cooling	4.0	5.0	5.4	6.8	8.0
	Heating	4.4	5.6	6.8	8.0	9.6

Indoor Unit	BTU	kW Class						
 ASYG07/09/12/14KGTB	7,000	2.0	●	●	●	●	●	●
	9,000	2.5	●	●	●	●	●	●
	12,000	3.5	●	●	●	●	●	●
 ASYG07/09/12/14KMCC	14,000	4.0	—	●	●	●	●	●
	18,000	5.0	—	—	—	●	●	●
	22,000	6.0	—	—	—	—	●	●
 ASYG18/22/24KMTB	24,000	7.0	—	—	—	—	●	●
	9,000	2.5	●	●	●	●	●	●
	12,000	3.5	●	●	●	●	●	●
 AGYG09/12/14KVCA	14,000	4.0	—	●	●	●	●	●
	7,000	2.0	●	●	●	●	●	●
	9,000	2.5	●	●	●	●	●	●
 AUXG07/09/12/14/18/22KVLA	12,000	3.5	●	●	●	●	●	●
	14,000	4.0	—	●	●	●	●	●
	18,000	5.0	—	—	—	●	●	●
	22,000	6.0	—	—	—	—	●	●
	7,000	2.0	●	●	●	●	●	●
 ARXG07/09/12/14/18KSLAP	9,000	2.5	●	●	●	●	●	●
	12,000	3.5	●	●	●	●	●	●
	14,000	4.0	—	●	●	●	●	●
	18,000	5.0	—	—	—	●	●	●
	7,000	2.0	●	●	●	●	●	●
 ARXG07/09/12/14/18KLLAP	9,000	2.5	●	●	●	●	●	●
	12,000	3.5	●	●	●	●	●	●
	14,000	4.0	—	●	●	●	●	●
	18,000	5.0	—	—	—	●	●	●
	7,000	2.0	●	●	●	●	●	●
 ARXG22KMLB	22,000	6.0	—	—	—	—	●	●
	18,000	5.0	—	—	—	●	●	●
 ABYG18/22KRTA	22,000	6.0	—	—	—	—	●	●
	18,000	5.0	—	—	—	●	●	●



Type	6-unit	8-unit
Model name	AOYG45LBA6	AOYG45LBT8
Multi-split Type Outdoor Unit		
Capacity (kW)	Cooling	12.5
	Heating	13.5

Indoor Unit	BTU	kW Class		
 ASYG07/09/12/14LMCE	7,000	2.0	●	●
	9,000	2.5	●	●
	12,000	3.5	●	●
 ASYG07/09/12/14LUCA	14,000	4.0	●	●
	18,000	5.0	●	●
	24,000	7.0	●	●
 AGYG09/12/14LV	9,000	2.5	●	●
	12,000	3.5	●	●
	14,000	4.0	●	●
 AUYG07/09/12/14/18LV	7,000	2.0	●	●
	9,000	2.5	●	●
	12,000	3.5	●	●
	14,000	4.0	●	●
	18,000	5.0	●	●
 ABYG14LVTA	14,000	4.0	●	●
	18,000	5.0	●	●
 ARYG07/09/12/14/18LSLAP	7,000	2.0	●	—
	9,000	2.5	●	—
	12,000	3.5	●	—
	14,000	4.0	●	—
	18,000	5.0	●	—
 ARYG07/09/12/14/18LL	7,000	2.0	●	●
	9,000	2.5	●	●
	12,000	3.5	●	●
	14,000	4.0	●	●
	18,000	5.0	●	●

Simultaneous Multi-split Connectable Indoor Units



Type	4HP		5HP		6HP	
Model name	AOYG36KBTB	AOYG36KRTA	AOYG45KBTB	AOYG45KRTA	AOYG54KBTB	AOYG54KRTA
Simultaneous Multi-split Outdoor Unit						
Capacity (kW)	Cooling	9.5	12.1	13.4	13.4	
	Heating	10.8	13.5	15.5	15.5	

Indoor Unit	BTU	kW Class	Twin			Triple
 AUXG18/22/24KVLA	18,000	5.0	● ×2	—	—	● ×3
	22,000	6.5	—	● ×2	—	—
	24,000	7.0	—	—	● ×2	—
 ARXG18KLLAP	18,000	5.0	● ×2	—	—	● ×3
 ARXG22KMLB ARXG24KMLA	22,000	6.5	—	● ×2	—	—
	24,000	7.0	—	—	● ×2	—
Separation tube			UTP-SX236A (18/22/24)			UTP-SX354A (18)



Type	8HP		10HP	
Model name	AOYG72LRLA		AOYG90LRLA	
Simultaneous Multi-split Outdoor Unit				
Capacity (kW)	Cooling	19.0	22.0	
	Heating	22.4	27.0	

Indoor Unit	BTU	kW Class	Twin	Triple	Double Twin	Twin	Triple	Double Twin
 AUYG18/22/24LV	18,000	5.0	—	—	● ×4	—	—	—
	22,000	6.5	—	—	—	—	—	● ×4
	24,000	7.0	—	● ×3	—	—	—	—
 AUYG30/36/45LR	30,000	8.8	—	—	—	—	● ×3	—
	36,000	10.6	● ×2	—	—	—	—	—
	45,000	12.5	—	—	—	● ×2	—	—
 ARYG18LLTB	18,000	5.0	—	—	● ×4	—	—	—
	22,000	6.5	—	—	—	—	—	● ×4
	24,000	7.0	—	● ×3	—	—	—	—
 ARYG22/24/30/36/45LM	30,000	8.8	—	—	—	—	● ×3	—
	36,000	10.6	● ×2	—	—	—	—	—
	45,000	12.5	—	—	—	● ×2	—	—
	18,000	5.0	—	—	● ×4	—	—	—
 ABYG18/22/24LV	22,000	6.5	—	—	—	—	—	● ×4
	24,000	7.0	—	● ×3	—	—	—	—
	30,000	8.8	—	—	—	—	● ×3	—
 ABYG30/36/45LR	36,000	10.6	● ×2	—	—	—	—	—
	45,000	12.5	—	—	—	● ×2	—	—
Separation tube			UTP-SX272A ×1	UTP-SX372A ×1	UTP-SX272A ×1, UTP-SX236A ×2	UTP-SX272A ×1	UTP-SX372A ×1	UTP-SX272A ×1, UTP-SX254A ×2

2-unit,
3-unit,
4-unit,
5-unit,
Multi-split



High energy saving


All models achieve high energy efficiency rank of A+++ for cooling and A++ for heating by using High efficiency DC twin rotary compressor.

Rank
Cooling
A+++
Heating
A++

SEER
8.7^{*1}

SCOP
4.7

^{*1}: 2-unit 14 class

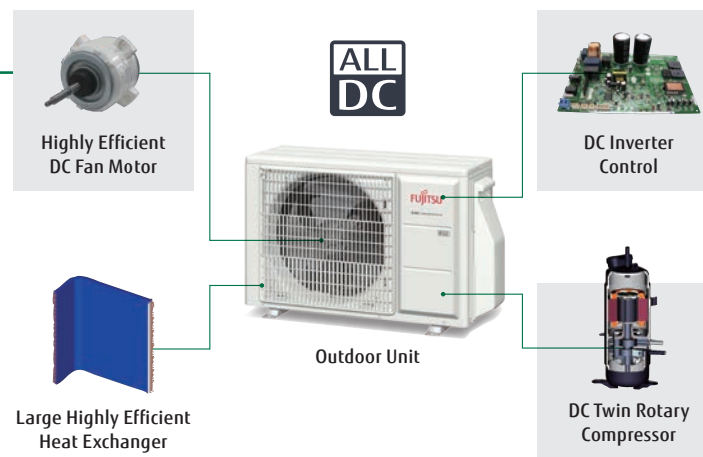


R32 refrigerant model

R32 refrigerant is highly energy efficient, plus the volumetric capacity of R32 is higher than that of R410A. R32 models require less refrigerant charge amount compared with R410A models.

	Pre-charge refrigerant amount (kg)	
	R32	R410A
2-unit 14 class	0.9	1.25
2-unit 18 class	1.02	1.30
3-unit 18 class	1.8	2.2
3-unit 24 class	1.8	2.2
4-unit 30 class	2.2	3.3
5-unit 36 class	2.5	4.0

Quiet operation

Maximum 7dB lower sound power level compared with current R410A model.

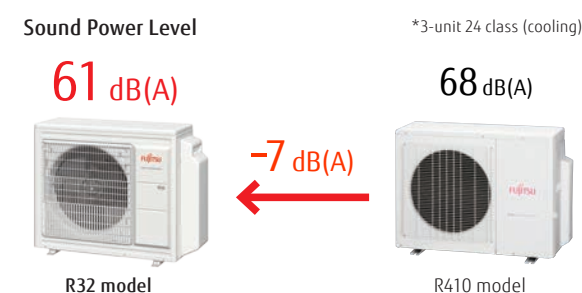


Space-saving installation

Multiple indoor units can be connected to 1 outdoor unit, and long piping connection is also possible. Compared with single type, the outdoor unit can be installed in various places to realize the space-saving installation.




Compact design

Compared with single type, the outdoor unit can be installed in various places to realize the space-saving installation.

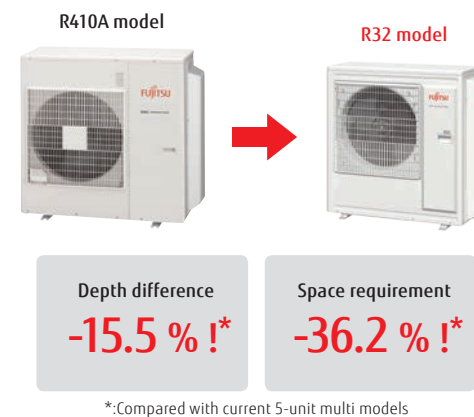


Easy evacuation

All connected pipes and indoor units can be evacuated quickly via our centralized valve method. Requires evacuation only once.

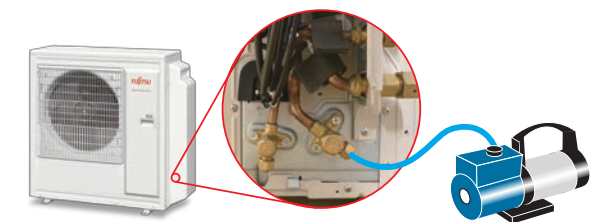

Wide range of indoor units with various models

5 types / 41 models are lined up in the capacity range from 2.0 kW to 6.0 kW class. Wide range of requirements can be realized from in private homes, large shops and hotels.

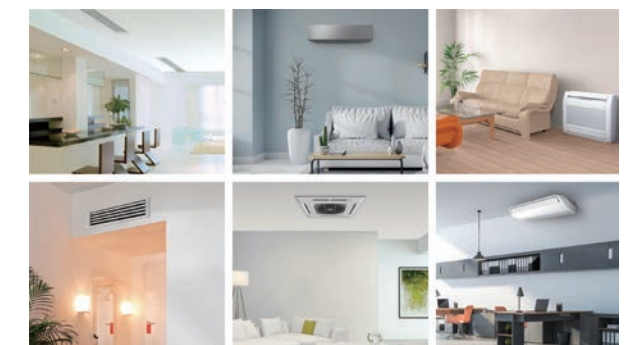

Models equipped with the New R32 Refrigerant

Wall mounted type with sophisticated design



Middle and small capacity models are available. This makes it easier to install in small spaces.



2-unit: AOYG14KBTA2 / AOYG18KBTA2
3-unit: **NEW** AOYG18KBTA3 / **NEW** AOYG24KBTA3
4-unit: **NEW** AOYG30KBTA4
5-unit: **NEW** AOYG36KBTA5



Specifications (2-unit)

Model No.			AOYG14KBTA2		AOYG18KBTA2		
Power Source			Single phase, ~230V, 50Hz				
Rated Capacity (Min. - Max.)	Cooling	kW	4.0 (1.4-4.6)		5.0 (1.7-5.8)		
	Heating		4.4 (1.1-5.5)		5.6 (1.8-6.6)		
EER	Cooling	W/W	4.12		4.03		
COP	Heating		4.63		4.59		
Sound Pressure Level (High)	Cooling	dB(A)	47		47		
	Heating		49		50		
Sound Power Level (High)	Cooling		60		60		
	Heating		62		62		
Airflow Rate	Cooling/Heating	m³/h	1,670/1,670		1,960/2,020		
Net Dimensions H × W × D		mm	542 × 799 × 290		632 × 799 × 290		
Weight		kg(lbs)	33 (73)		37 (82)		
Connection Pipe Diameter	Liquid	mm	6.35 × 2		6.35 × 2		
	Gas		9.52 × 2		9.52 × 2		
Max. Pipe Length		Total / Each	30 / 20		30 / 20		
Max. Height Difference	Between Outdoor Unit and Each Indoor Units.		m	15		15	
	Between Indoor Units.			10		10	
Operating Range	Cooling	°CDB	-10 to 46		-10 to 46		
	Heating		-15 to 24		-15 to 24		
Refrigerant	Type (Global Warming Potential)		R32 (675)		R32 (675)		
	Charge	kg(CO2eq-T)	0.9 (0.608)		1.02 (0.689)		

Specifications (3-unit)

Model No.			AOYG18KBTA3		AOYG24KBTA3	
Power Source			Single phase, ~230V, 50Hz			
Rated Capacity (Min. - Max.)	Cooling	kW	5.4 (1.8-7.0)		6.8(1.8-8.5)	
	Heating		6.8 (2.0-8.0)		8.0(2.0-9.2)	
EER	Cooling	W/W	4.78		3.90	
COP	Heating		4.89		4.40	
Sound Pressure Level (High)	Cooling	dB(A)	46		48	
	Heating		49		53	
Sound Power Level (High)	Cooling		59		61	
	Heating		61		67	
Airflow Rate	Cooling/Heating	m³/h	2,220/2,160		2,270/2,730	
Net Dimensions H × W × D		mm	716 × 820 × 315		716 × 820 × 315	
Weight		kg(lbs)	46(102)		46(102)	
Connection Pipe Diameter	Liquid	mm	6.35 × 3		6.35 × 3	
	Gas		9.52 × 3		9.52 × 2, 12.70 × 1 adapter [12.70 → 9.52] × 1	
Max. Pipe Length		Total / Each	50/25		50/25	
Max. Height Difference	Between Outdoor Unit and Each Indoor Units.	m	15		15	
	Between Indoor Units.		10		10	
Operating Range	Cooling	°CDB	-10 to 46		-10 to 46	
	Heating		-15 to 24		-15 to 24	
Refrigerant	Type (Global Warming Potential)		R32 (675)		R32 (675)	
	Charge	kg(CO2eq-T)	1.8 (1.215)		1.8 (1.215)	

Specifications (4-unit, 5-unit)


Model No.			AOYG30KBTA4		AOYG36KBTA5		
Power Source			Single phase, ~230V, 50Hz				
Rated Capacity (Min. - Max.)	Cooling	kW	8.0 (2.4-10.1)		9.5 (3.0-11.0)		
	Heating		9.6 (3.0-11.2)		10.6 (3.5-12.0)		
EER	Cooling	W/W	3.90		3.80		
COP	Heating		4.55		4.50		
Sound Pressure Level (High)	Cooling	dB(A)	50		52		
	Heating		54		55		
Sound Power Level (High)	Cooling		63		65		
	Heating		66		68		
Airflow Rate	Cooling/Heating	m³/h	2,400/2,950		2,450/2,900		
Net Dimensions H × W × D		mm	884 × 820 × 315		884 × 820 × 315		
Weight		kg(lbs)	55(121)		59(130)		
Connection Pipe Diameter	Liquid	mm	6.35×4		6.35×5		
	Gas		9.52 × 2, 12.70 × 2 adapter [12.70 → 9.52] × 2		9.52 × 3, 12.70 × 2 adapter [12.70 → 9.52] × 2 adapter [9.52 → 12.70] × 1		
Max. Pipe Length*		Total / Each	70/25		75/25		
Max. Height Difference	Between Outdoor Unit and Each Indoor Units.		m	15		15	
	Between Indoor Units.			10		10	
Operating Range	Cooling	°CDB	-10 to 46		-10 to 46		
	Heating		-15 to 24		-15 to 24		
Refrigerant	Type (Global Warming Potential)		R32 (675)		R32 (675)		
	Charge	kg(CO2eq-T)	2.2 (1.485)		2.5 (1.688)		

*The length would not be applied when floor units are connected. For the detailed condition, please refer to the installation manual.


Dimensions

(Unit : mm)


2-unit: AOYG14KBTA2

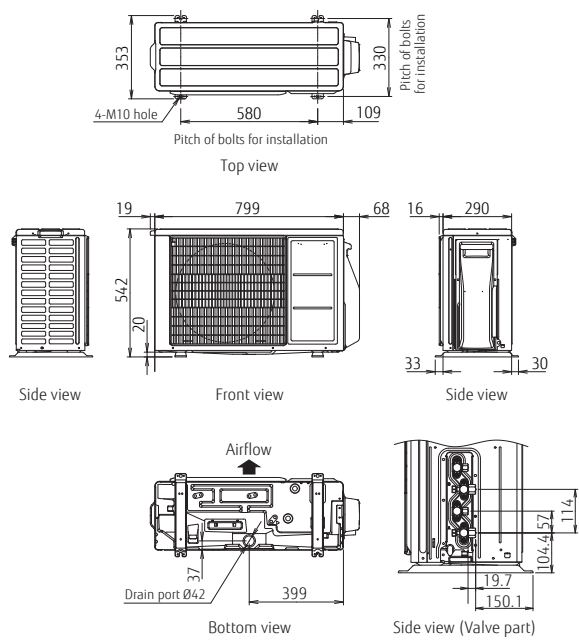


2-unit: AOYG18KBTA2

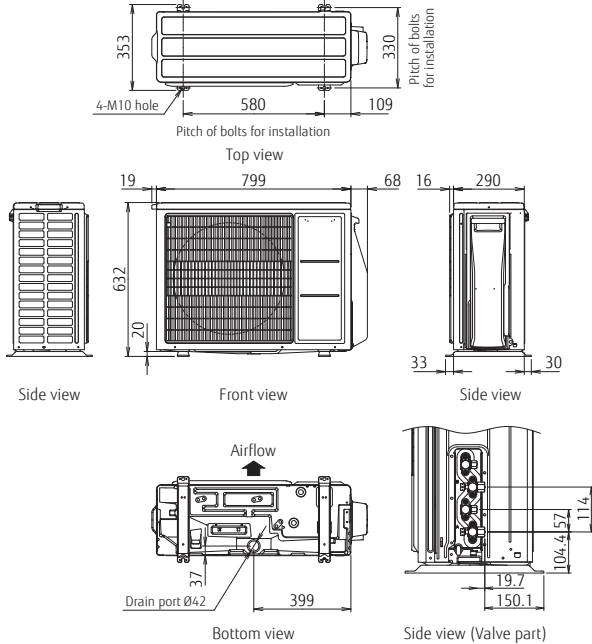

3-unit: AOYG18KBTA3 / AOYG24KBTA3

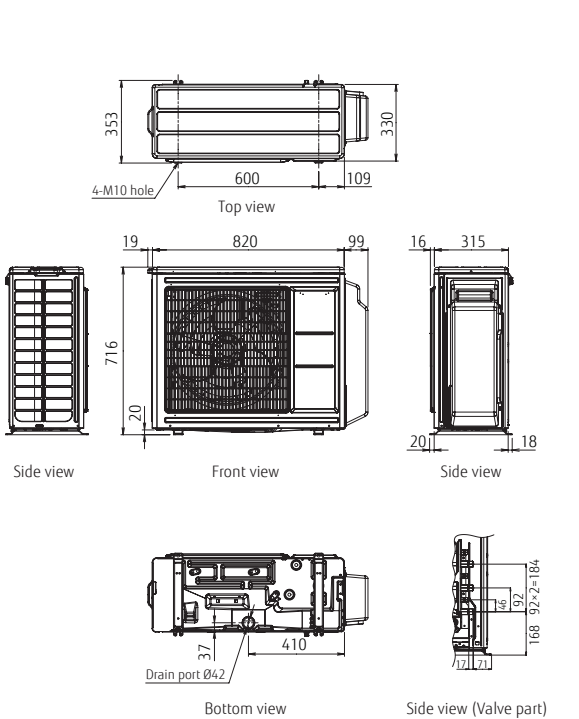

4-unit: AOYG30KBTA4
5-unit: AOYG36KBTA5

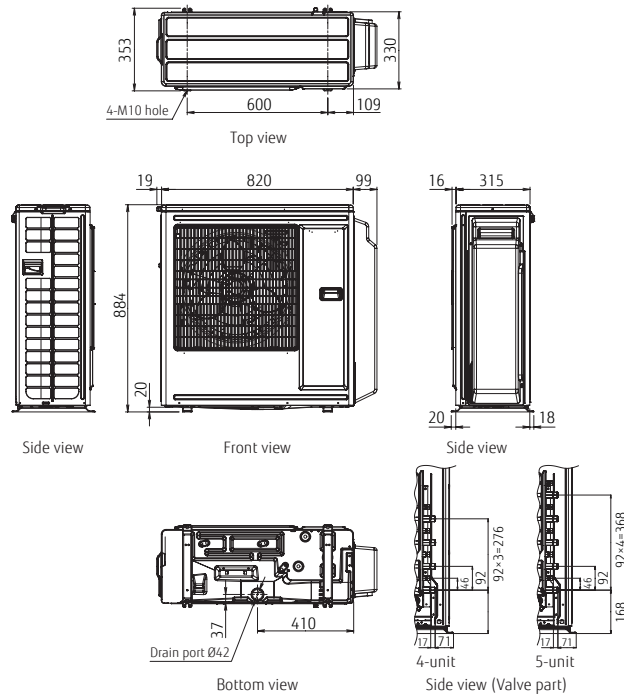


6-unit
Multi-split



Wide range of indoor units with various models

4 types / 16 models are lined up in the capacity range from 2.0 kW to 4.0 kW class. Wide range of requirements can be realized from in private homes, large shops and hotels.

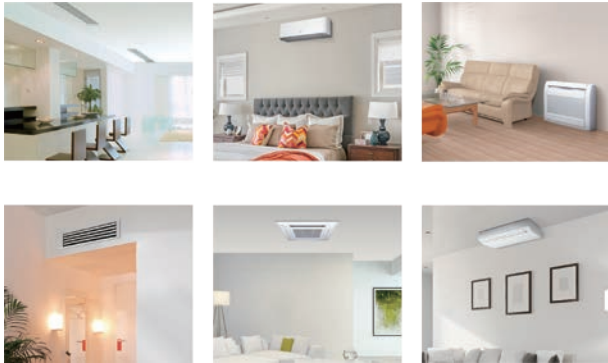


Compact design

Multiple indoor units can be connected to 1 outdoor unit, and long piping connection is also possible. Compared with single type, the outdoor unit can be installed in various places to realize the space-saving installation.



Easy installation

All connected pipes and indoor units can be evacuated quickly via our centralized valve method. Requires evacuation only once

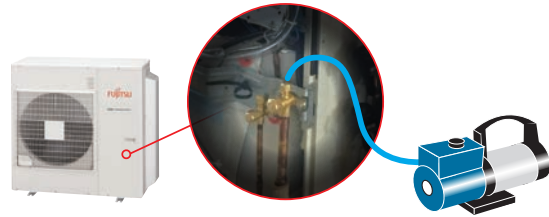

Central & Individual Control

- Batched control of up to 8 indoor units. The temperature, airflow volume, and remote control prohibition settings of all indoor units can be batched.
- Corresponds to 9 different languages (English, German, French, Spanish, Russian, Portuguese, Italian, Greek, and Turkish)
- Large backlight LED screen
- Large easy-to-see operation panel

Max. Controllable
1 multi system
Max. Controllable
8 indoor units



6-unit: AOYG45LBLA6




Specifications (5-unit, 6-unit)

Model No.			AOYG45LBLA6	
Power Source			Single phase, ~230V, 50Hz	
Rated Capacity (Min. - Max.)	Cooling	kW	12.5 (3.5-14.0)	
	Heating		13.5 (3.5-16.0)	
EER	Cooling	W/W	3.50	
COP	Heating		4.00	
Sound Pressure Level (High)	Cooling	dB(A)	53	
	Heating		55	
Sound Power Level (High)	Cooling		-	
	Heating		-	
Airflow Rate	Cooling/Heating	m³/h	4,200/4,200	
Net Dimensions H × W × D		mm	998 × 970 × 370	
Weight		kg(lbs)	94 (207)	
Connection Pipe Diameter	Liquid	mm	6.35×6	
	Gas		9.52 × 4, 12.70 × 2	
Max. Pipe Length	Total / Each		80 / 25	
Max. Height Difference	Between Outdoor Unit and Each Indoor Units.	m	15	
	Between Indoor Units.		10	
Operating Range	Cooling	°CDB	-10 to 46	
	Heating		-15 to 24	
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	
	Charge	kg(CO2eq-T)	4.00 (8.352)	

Dimensions

(Unit : mm)

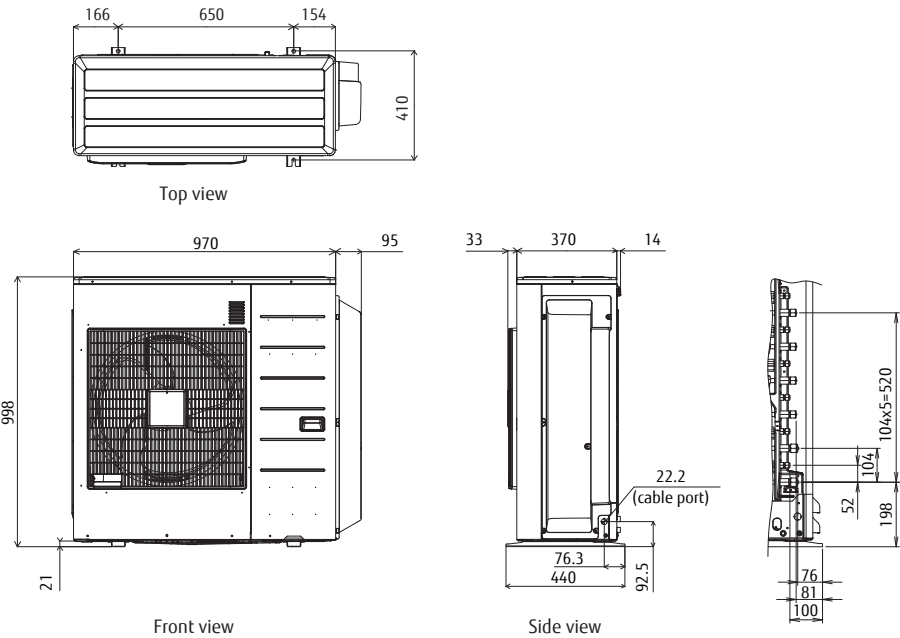


8-unit
Multi-split




Compact outdoor unit

The compact design outdoor unit allows to be installed below a window and in a narrow space.

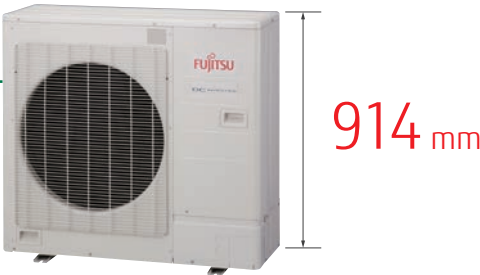

High seasonal efficiency

The actual performance is conducted under various outside temperatures depending on weather and seasons, furthermore, especially for multi system, not all the rooms are operated all the time. So over 90% of actual operation time, air conditioners are operated at partial capacity instead of rated capacity. Considering these, we focused on energy-saving performance which is based on actual use. Efficiency of part load performance was drastically improved by developing ALL DC and our own inverter system.

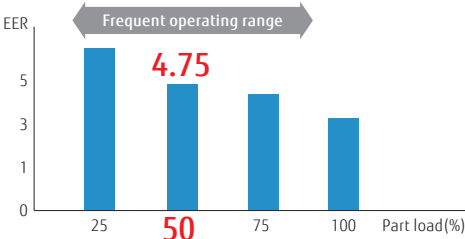

Innovated technology



High efficiency large fan:
High efficiency fan is mounted.



DC fan motor:
High performance and high efficiency has been realized by using a small DC fan motor.




Heat exchanger:
Reduced compact size and energy saving has been realized by utilizing high density piping design and 3-Row heat exchanger.



High efficiency DC twin rotary compressor:
A high performance, low noise, large capacity DC twin rotary compressor is used.


Quick comfort by
optimized refrigerant control

Every room meets the set point most quickly and comfortably by optimized refrigerant control.

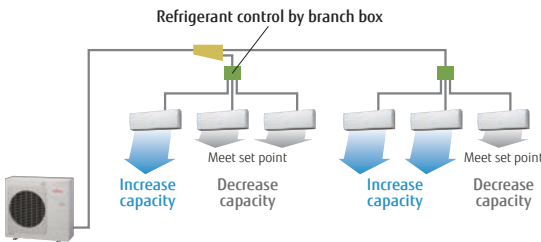

8-unit: AOYG45LBT8

Branch Box: UTP-PY03A / UTP-PY02A



Specifications (Outdoor unit/Branch box)

Outdoor Unit Model Name			AOYG45LBT8
Maximum Connectable Indoor Unit			8
Indoor Unit Connectable Capacity		Cooling	11.2 - 18.2
		kW	
Power source			Single phase, ~230V, 50Hz
Rated Capacity	Cooling	kW	14.0
	Heating	kW	16.0
Input Power	Cooling	kW	5.20
	Heating	kW	5.07
Airflow rate	Cooling	m³/h	4,650
	Heating	m³/h	4,800
Sound Pressure Level	Cooling	dB(A)	56
	Heating	dB(A)	58
Heat Exchanger Fin			Plate fin coil
Net Dimensions H × W × D		mm	914 × 970 × 370
Weight		kg(lbs)	98 (216)
Connection Pipe Diameter (Liquid / Gas)		mm	9.52/15.88
Max. Pipe Length		m	115 (Total)
Max. Height Difference (O.U ~ I.U)		m	30
Operating Range	Cooling	°CDB	-5 to 46
	Heating	°CDB	-15 to 24
Refrigerant	Type (Global Warming Potential)		R410A (2,088)
	Charge	kg(CO2eq-T)	3.45 (7.204)


Branch Box Model Name		UTP-PY03A	UTP-PY02A
Connectable Indoor Unit		1 to 3 Units	1 to 2 Units
Power source		Single phase, ~230V, 50Hz	Single phase, ~230V, 50Hz
Available Voltage Range		198-264V	198-264V
Power Consumption		W	10
Running Current		A	0.05
Net Dimensions H × W × D		mm	195 × 433 × 370
Weight		kg(lbs)	9 (20)
Connection pipe diameter	Liquid	°CDB	Main: 9.52×1, Branch:6.35×3
	Gas	°CDB	Main: 15.88×1, Branch:12.70×3
	Method		Flare

Note: Specifications are based on the following conditions.


- In case of connecting two indoor units(7 kW class).
- These are the measured values in the manufacturer's anechoic chamber.
- Cooling: Indoor temp. of 27°CDB/19°CWB, outdoor temp. of 35°CDB/24°CWB Heating: Indoor temp. of 20°CDB/15°CWB, outdoor temp. of 7°CDB/6°CWB
Pipe length: 5 m (Outdoor unit - Branch box), 3 m (Branch box - Indoor unit) Height difference : 0 m

Dimensions


(Unit : mm)

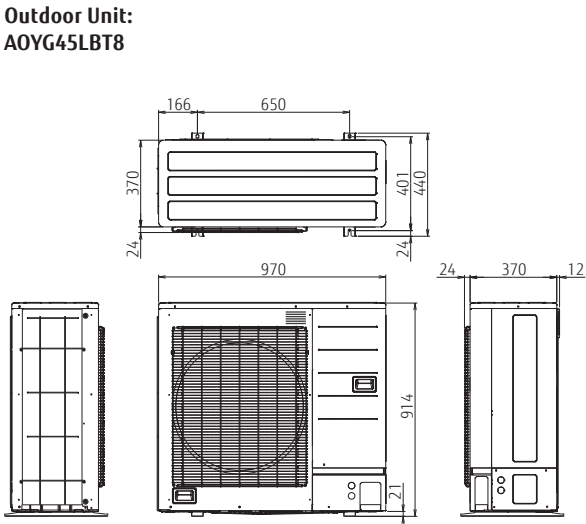

Branch Box :
UTP-PY03A (3 zones type)

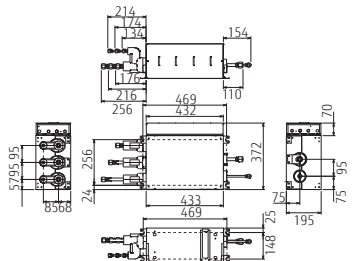

Branch Box :
UTP-PY02A (2 zones type)

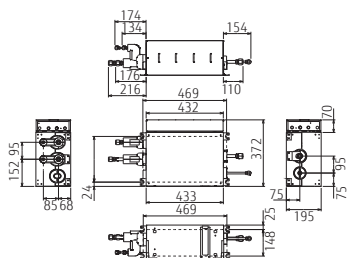


Simultaneous
Multi-split
Twin/Triple




Supports various installation scenes from office to commercial space, inside the same room and multi connection of up to 3 indoor units.

Selection of indoor units according to the room shape and heat load, like number of people and lighting conditions.
Most comfortable air flow distribution can be realized.

Installation according to floor layout



Installation according to lighting conditions



Design flexibility

Slim & Compact design

This model is much more compact than a conventional outdoor unit. Significant reduced height of the product supports installations in narrow spaces.



R410A model




R32 model

Height
-22.7%*
(* : 45/54models)

Flexible installation

Up to max. piping length of 50 m, max. height difference of 30 m can be supported. Multi-split type can be installed in large-size residence or buildings with multiple floors.

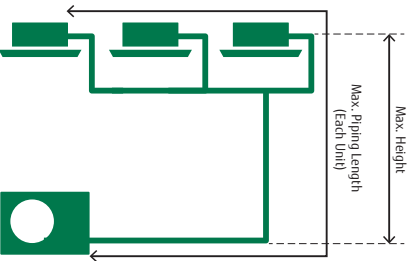

Max.
Piping Length
(Each Unit):
50 m
Max. Height:
30 m

New Indoor unit lineup

3 types 6 models indoor units are provided, so you can select them depending on your room size and conditions.



Compact Cassette



Slim Duct



Duct

Model: AOYG36KBTB / AOYG45KBTB / AOYG54KBTB
AOYG36KRTA [3 phase] / AOYG45KRTA [3 phase] / AOYG54KRTA [3 phase]



Specifications (Indoor units/Outdoor units)

Indoor Units Model No.				Compact Cassette		
				AUXG18KVLA	AUXG22KVLA	AUXG24KVLA
Power Source				Single phase, ~230V, 50Hz		
Airflow Rate	Cooling	H/M/L/Q	m³/h	680/580/490/410	830/740/600/450	930/830/600/450
	Heating	H/M/L/Q		800/680/580/450	860/760/700/530	930/850/700/530
Net Dimension H × W × D			mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
Weight			kg(lbs)	15 (33)	16 (35)	16 (35)
Cassette Grille				UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W

Indoor Units Model No.				Duct		
				ARXG18KLLAP	ARXG22KMLB	ARXG24KMLA
Power Source				Single phase, ~230V, 50Hz		
Airflow Rate	Cooling	H/M/L/Q	m³/h	940/880/820/750	1,100/910/750/580	1,100/910/750/580
	Heating	H/M/L/Q		940/880/820/750	1,100/910/750/580	1,100/910/750/580
Net Dimension H × W × D				198 × 900 × 620	270 × 1,135 × 700	270 × 1,135 × 700
Weight				20 (44)	35 (77)	35 (77)



Outdoor Units Model No.			AOYG36KBTB	AOYG45KBTB	AOYG54KBTB	AOYG36KRTA	AOYG45KRTA	AOYG54KRTA
Capacity	Cooling	kW	9.5	12.1	13.4	9.5	12.1	13.4
	Heating		10.8	13.5	15.5	10.8	13.5	15.5
Power Source			Single phase, ~230V, 50Hz			3 phase, ~400V, 50Hz		
Pdesign	Cooling	kW	9.5	—	—	9.5	—	—
	Heating (-10°C)		8.7	—	—	8.7	—	—
SEER	Cooling	W/W	6.10	—	—	6.10	—	—
SCOP	Heating		4.00	—	—	4.00	—	—
Annual Energy Consumption	Cooling	kWh/a	545	—	—	545	—	—
	Heating		3,044	—	—	3,044	—	—
Energy Efficiency Class	Cooling		A++	—	—	A++	—	—
	Heating		A+	—	—	A+	—	—
Sound Pressure Level (High)	Cooling	dB(A)	55	57	57	55	57	57
	Heating		55	57	59	55	57	59
Sound Power Level (High)	Cooling		70	71	73	70	71	73
	Heating		70	71	73	70	71	73
Airflow Rate	Cooling / Heating	m³/h	3,750/3,750	4,450/4,450	4,450/4,450	3,750/3,750	4,450/4,450	4,450/4,450
Net Dimension H × W × D			mm	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320
Weight			kg(lbs)	52 (115)	67 (148)	67 (148)	53 (117)	67 (148)
Connection Pipe Diameter (Liquid / Gas)			mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Max. Pipe Length (Pre-Charge)			m	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)
Max. Height Difference				30	30	30	30	30
Operating Range	Cooling	°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)	kg(CO2eq-T)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge		1.90(1.283)	2.70(1.823)	2.70(1.823)	1.90(1.283)	2.70(1.823)	2.70(1.823)
Separation tube			UTP-SX236A(Twin)	UTP-SX236A(Twin)	UTP-SX236A(Twin) UTP-SX354A(Triple)	UTP-SX236A (Twin)	UTP-SX236A (Twin)	UTP-SX236A(Twin) UTP-SX354A(Triple)

• Different type and capacity indoor units cannot be connected.
• The above table is the value for connecting with cassette type.




Dimensions

(Unit : mm)

AOYG36KBTB / AOYG36KRTA



AOYG45KBTB / AOYG54KBTB
AOYG45KRTA / AOYG54KRTA




Simultaneous
Multi-split
Twin/Triple/Double Twin




Support various applications from open plan offices to retail stores, with up to 4 indoor units.

Selection of indoor units according to the room shape and heat load, like number of people and lighting conditions. Most comfortable air flow distribution can be realized.


Installation according to floor layout




Installation according to lighting conditions



Installation according to layout and lighting conditions




Installation according to large space



Simultaneous control

Max 16 indoor units are simultaneously controlled with a wired remote controller.

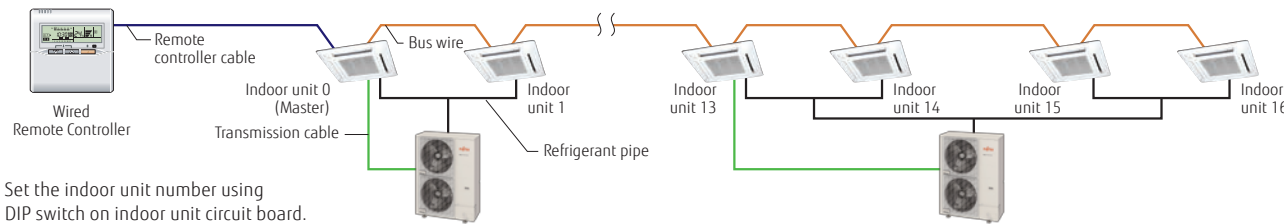

Set the indoor unit number using DIP switch on indoor unit circuit board.

*When using a wireless remote controller, the following functions cannot be used: Timer operation, Sleep Timer operation, 10°C Heat operation

Indoor unit lineup

6 types 18 models indoor units are provided, so you can select them depending on your room size and conditions.



Model: AOYG72LRLA [3 phase] / AOYG90LRLA [3 phase]



Specifications (Indoor units/Outdoor units)

Indoor Units Model No.				Compact Cassette, Cassette					
				AUYG18LVLB	AUYG22LVLA	AUYG24LVLA	AUYG30LRLE	AUYG36LRLE	AUYG45LRLA
Power Source				Single phase, ~230V, 50Hz					
Airflow Rate	Cooling	H/M/L/Q	m³/h	750/610/520/410	930/830/600/450	930/830/600/450	1,600/1,400/1,270/1,150	1,800/1,400/1,270/1,150	1,900/1,640/1,460/1,250
	Heating	H/M/L/Q		800/710/600/450	930/860/700/530	930/830/600/450	1,800/1,400/1,270/1,150	1,800/1,400/1,270/1,150	1,900/1,640/1,460/1,250
Net Dimension H × W × D			mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840
Weight			kg (lbs)	15 (33)	16 (35)	16 (35)	26 (57)	26 (57)	26 (57)
Cassette Grille				UTG-UFYD-W			UTG-UGYA-W		

Indoor Units Model No.				Duct					
				ARYG18LLTB	ARYG22LMLA	ARYG24LMLA	ARYG30LMLE	ARYG36LMLE	ARYG45LMLA
Power Source				Single phase, ~230V, 50Hz					
Airflow Rate	Cooling	H/M/L/Q	m³/h	940/880/820/750	1,100/910/750/580	1,100/910/750/580	1,900/1,620/1,270/980	1,900/1,620/1,270/980	2,100/1,750/1,350/1,070
	Heating	H/M/L/Q		940/880/820/750	1,100/910/750/580	1,100/910/750/580	2,100/1,620/1,270/980	2,100/1,620/1,270/980	2,100/1,750/1,350/1,070
Net Dimension H × W × D			mm	198 × 900 × 620	270 × 1135 × 700	270 × 1135 × 700	270 × 1135 × 700	270 × 1135 × 700	270 × 1135 × 700
Weight			kg (lbs)	23 (51)	38 (84)	38 (84)	40 (88)	40 (88)	40 (88)

Indoor Units Model No.				Floor/Ceiling, Ceiling					
				ABYG18LVTB	ABYG22LVTA	ABYG24LVTA	ABYG30LRTE	ABYG36LRTE	ABYG45LRTE
Power Source				Single phase, ~230V, 50Hz					
Airflow Rate	Cooling	H/M/L/Q	m³/h	780/700/560/500	980/820/680/540	980/820/680/540	1,660/1,500/1,200/1,000	1,900/1,500/1,200/1,000	2,100/1,700/1,400/1,100
	Heating	H/M/L/Q		780/700/560/500	980/820/680/540	980/820/680/540	1,660/1,500/1,200/1,000	1,900/1,500/1,200/1,000	2,100/1,700/1,400/1,100
Net Dimension H × W × D			mm	199 × 990 × 655	199 × 990 × 655	199 × 990 × 655	240 × 1660 × 700	240 × 1660 × 700	240 × 1660 × 700
Weight			kg (lbs)	27 (60)	27 (60)	27 (60)	46 (101)	46 (101)	46 (101)


Outdoor Units Model No.			AOYG72LRLA			AOYG90LRLA		
Capacity	Cooling	kW	19.0			22.0		
	Heating		22.4			27.0		
Power Source			3 phase, ~400V, 50Hz					
Sound Pressure Level (High)	Cooling/Heating	dB(A)	55/55			55/57		
Airflow Rate	Cooling / Heating	m³/h	8,400/8,400			8,400/9,000		
Net Dimension H × W × D		mm	1,428 × 1,080 × 480			1,428 × 1,080 × 480		
Weight		kg(lbs)	163 (359)			172 (379)		
Connection Pipe Diameter (Liquid / Gas)		mm	12.7/25.4			12.7/25.4		
Max. Pipe Length (Pre-Charge)		m	100 (30)			100 (30)		
Max. Height Difference			30			30		
Operating Range	Cooling	°CDB	-15 to 46			-15 to 46		
	Heating		-20 to 24			-20 to 24		
Refrigerant	Type (Global Warming Potential)		R410A (2,088)			R410A (2,088)		
	Charge	kg(CO2eq-T)	5.6 (11.693)			7.1 (14.825)		
Separation tube			UTP-SX272A × 1 (Twin)	UTP-SX372A × 1 (Triple)	UTP-SX272A × 1 UTP-236A × 2 (Double Twin)	UTP-SX272A × 1 (Twin)	UTP-SX372A × 1 (Triple)	UTP-SX272A × 1 UTP-SX254A × 2 (Double Twin)

*: That specification is not fixed yet.

• Different type and capacity indoor units cannot be connected.
• The above table is the value for connecting with cassette type.

Dimensions

(Unit : mm)

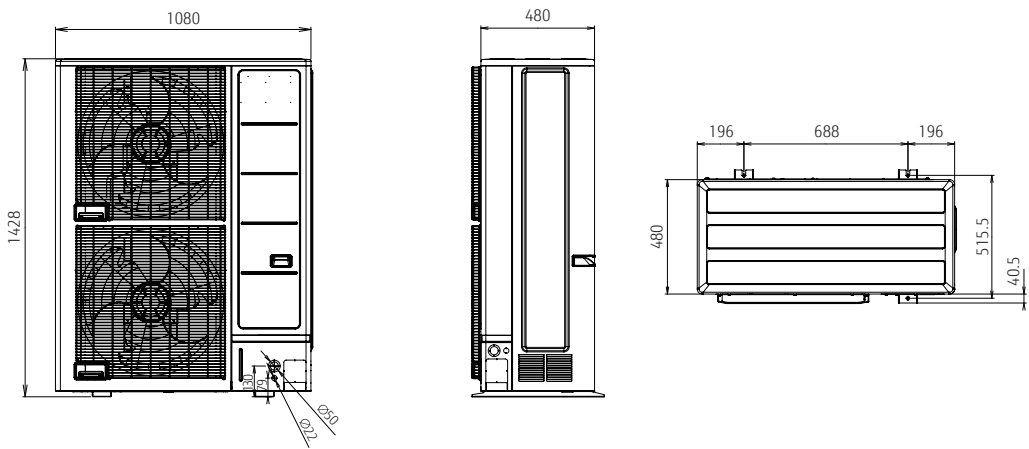

New 2-unit to 5-unit Multi-split Indoor Units Specifications

Wall mounted



Model No.	Indoor unit			ASYG07KGTB	ASYG09KGTB	ASYG12KGTB	ASYG14KGTB
kW Class		kW		2.0	2.5	3.5	4.0
Power Source				Single phase, ~230V, 50Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	38/33/29/21	40/34/29/21	40/35/30/21	43/36/30/21
	Heating			41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
Sound Power Level	Cooling	H	dB(A)	54	55	56	57
	Heating			56	57	58	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	650/540/430/270	700/560/430/270	700/560/430/270	770/600/450/280
	Heating			720/580/460/330	750/610/470/330	770/640/520/330	800/660/520/340
Net Dimensions		mm		270 × 834 × 215	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215
Weight		kg(lbs)		10 (22)	10 (22)	10 (22)	10 (22)
Connection Pipe Diameter		Liquid/Gas		6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52

Wall mounted



Model No.	Indoor unit			ASYG07KETA ASYG09KETA-B	ASYG09KETA ASYG09KETA-B	ASYG12KETA ASYG12KETA-B	ASYG14KETA ASYG14KETA-B
kW Class	kW			2.0	2.5	3.5	4.0
Power Source				Single phase, ~230V, 50Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	38/33/29/21	40/34/29/21	40/35/30/21	43/36/30/21
	Heating			41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
Sound Power Level	Cooling	H	dB(A)	54	55	55	57
	Heating			56	57	58	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	650/540/430/270	700/560/430/270	700/560/430/270	770/600/450/280
	Heating			720/580/460/330	750/610/470/330	770/640/520/330	800/660/520/340
Net Dimensions	mm			295 × 950 (wall side : 840) × 230	295 × 950 (wall side : 840) × 230	295 × 950 (wall side : 840) × 230	295 × 950 (wall side : 840) × 230
Weight	kg(lbs)			11(24)	11(24)	11(24)	11.5(25)
Connection Pipe Diameter	Liquid/Gas			6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52

Wall mounted



Model No.	Indoor unit			ASYG07KMCC	ASYG09KMCC	ASYG12KMCC	ASYG14KMCC
kW Class		kW		2.0	2.5	3.5	4.0
Power Source				Single phase, ~230V, 50Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	38/33/29/21	40/34/29/21	40/35/30/21	43/36/30/21
	Heating			41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
Sound Power Level	Cooling	H	dB(A)	54	55	55	57
	Heating			56	57	58	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	650/540/430/320	700/560/430/320	700/560/430/320	770/600/450/310
	Heating			720/580/460/330	750/610/470/330	780/640/520/330	820/660/520/340
Net Dimensions			mm	270 × 834 × 222	270 × 834 × 222	270 × 834 × 222	270 × 834 × 222
Weight			kg(lbs)	10 (22)	10 (22)	10 (22)	10 (22)
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52

Wall mounted



Model No.	Indoor unit			ASYG18KMTB	ASYG22KMTB	ASYG24KMTB
kW Class		kW		5.0	6.0	7.0
Power Source				Single-phase, ~230V, 50Hz		
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	45/40/35/29	48/40/35/29	49/40/35/29
	Heating			46/40/35/29	48/40/35/29	49/40/35/29
Sound Power Level	Cooling	H	dB(A)	60	62	65
	Heating			61	62	65
Airflow Rate	Cooling	H/M/L/Q	m³/h	980/810/640/510	1,060/810/640/510	1,170/850/640/510
	Heating			1,020/850/640/510	1,060/850/640/510	1,170/850/640/510
Net Dimensions		mm		280 × 980 × 240		
Weight		kg(lbs)		12.5(27)		
Connection Pipe Diameter		Liquid/Gas		6.35/12.70		

Floor



Model No.	Indoor unit			AGYG09KVCA	AGYG12KVCA	AGYG14KVCA
kW Class			kW	2.5	3.5	4.0
Power Source				Single-phase, ~230V, 50Hz		
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	39/34/28/22	42/36/30/22	44/38/31/22
	Heating			39/35/30/22	42/38/32/22	44/39/33/22
Sound Power Level	Cooling	H	dB(A)	52	55	56
	Heating			52	55	56
Airflow Rate	Cooling	H/M/L/Q	m³/h	530/440/360/270	600/490/380/270	650/520/400/270
	Heating			530/460/380/270	600/510/410/270	650/540/430/270
Net Dimensions			mm	600 × 740 × 200	600 × 740 × 200	600 × 740 × 200
Weight			kg(lbs)	14(31)	14(31)	14(31)
Connection Pipe Diameter			Liquid/Gas	6.35/9.52	6.35/9.52	6.35/9.52

Ceiling




Model No.	Indoor unit			ABYG18KRTA	ABYG22KRTA
kW Class		kW		5.0	6.0
Power Source				Single-phase, ~230V, 50Hz	
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	38/36/33/31	42/37/34/31
	Heating			38/36/33/31	42/37/34/31
Sound Power Level	Cooling	H	dB(A)	53	57
	Heating			53	57
Airflow Rate	Cooling	H/M/L/Q	m³/h	840/790/710/650	900/790/710/650
	Heating			840/790/710/650	900/790/710/650
Net Dimensions		mm		235 × 1,080 × 705	
Weight		kg(lbs)		24(52)	
Connection Pipe Diameter		Liquid/Gas		6.35/12.70	

Compact cassette Grid type



Model No.	Indoor unit			AUXG07KVLA	AUXG09KVLA	AUXG12KVLA	AUXG14KVLA	AUXG18KVLA	AUXG22KVLA
kW Class			kW	2.0	2.5	3.5	4.0	5.0	6.0
Power Source				Single phase, ~230V, 50Hz					
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	33/31/29/27	33/31/29/27	37/34/31/28	38/35/32/29	38/35/32/29	44/42/36/30
	Heating			34/32/29/27	34/32/29/27	37/34/31/29	43/38/34/30	43/38/34/30	45/43/40/33
Sound Power Level	Cooling	H	dB(A)	46	46	49	50	50	56
	Heating			47	47	49	55	55	57
Airflow Rate	Cooling	H/M/L/Q	m³/h	540/490/440/390	540/490/440/390	610/530/470/410	680/580/490/410	680/580/490/410	830/740/600/450
	Heating			540/490/440/390	540/490/440/390	610/530/470/410	790/680/580/450	790/680/580/450	860/760/700/530
Net Dimensions			mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
Weight			kg(lbs)	15 (33)	15 (33)	15 (33)	15 (33)	15(33)	16(35)
Panel				UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W
Connection Pipe Diameter			Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70	6.35/12.70

Mini duct



Model No.	Indoor unit			ARXG07KSLAP	ARXG09KSLAP	ARXG12KSLAP	ARXG14KSLAP	ARXG18KSLAP
kW Class			kW	2.0	2.5	3.5	4.0	5.0
Power Source				Single phase, ~230V, 50Hz				
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23	33/29/26/23
	Heating			29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23	33/29/26/23
Sound Power Level	Cooling	H	dB(A)	52	54	55	60	58
	Heating			53	56	57	62	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360	940/750/540/480
	Heating			550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360	940/750/540/480
Net Dimensions			mm	198 × 700 × 450		198 × 700 × 450		198 × 900 × 450
Weight			kg(lbs)	15.5 (34)		15.5 (34)		18.5(40)
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52		6.35/9.52		6.35/12.70
External static pressure			Pa	0 to 30		0 to 30		0 to 50
Drain pump				Standard		Standard		Standard

Slim duct



Model No.	Indoor unit			ARXG07KLLAP	ARXG09KLLAP	ARXG12KLLAP	ARXG14KLLAP	ARXG18KLLAP
kW Class			kW	2.0	2.5	3.5	4.0	5.0
Power Source				Single-phase, ~230V, 50Hz				
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	28/26/25/24	28/27/26/25	29/28/27/26	32/30/28/26	32/30/29/27
	Heating			28/26/25/24	28/26/25/24	29/28/27/24	32/30/28/25	32/30/29/27
Sound Power Level	Cooling	H	dB(A)	57	57	58	60	58
	Heating			57	57	58	60	58
Airflow Rate	Cooling	H/M/L/Q	m³/h	550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
	Heating			550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
Net Dimensions			mm	198 × 700 × 620				
Weight			kg(lbs)	16 (35)				
Connection Pipe Diameter			Liquid/Gas	6.35/9.52				
External static pressure			Pa	0 to 90				
Drain pump				Standard				

Medium Static Pressure Duct



Model No.	Indoor unit			ARXG22KMLB
kW Class		kW		6.0
Power Source		Single-phase, ~230V, 50Hz		
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	31/29/27/25
	Heating			31/29/27/25
Sound Power Level	Cooling	H	dB(A)	60
	Heating			62
Airflow Rate	Cooling	H/M/L/Q	m³/h	1,100/910/750/580
	Heating			1,100/910/750/580
Net Dimensions		mm		270 × 1,135 × 700
Weight		kg(lbs)		35(77)
Connection Pipe Diameter		Liquid/Gas	mm	6.35/12.70
External static pressure		Pa		30 to 150
Drain pump		Standard		

6-unit to 8-unit Multi-split Indoor Units Specifications

Compact wall mounted



Model No.	Indoor unit			ASYG07LUCA	ASYG09LUCA	ASYG12LUCA	ASYG14LUCA
kW Class		kW		2.0	2.5	3.5	4.0
Power Source				Single phase, ~230V, 50Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	35/30/28/21	36/32/28/21	37/34/31/21	41/36/33/25
	Heating			35/30/28/21	36/32/28/21	37/34/31/21	41/36/34/27
Sound Power Level	Cooling	H	dB(A)	53	54	55	59
	Heating			53	54	55	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	570/520/470/330	600/550/470/330	660/600/530/330	710/640/570/390
	Heating			570/520/470/330	600/550/470/330	660/600/530/330	710/640/590/430
Net Dimensions			mm	282 × 870 × 185	282 × 870 × 185	282 × 870 × 185	282 × 870 × 185
Weight			kg(lbs)	9.5 (21)	9.5 (21)	9.5 (21)	9.5 (21)
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70

Wall mounted



Model No.	Indoor unit			ASYG18LFCA	ASYG24LFCC
kW Class		kW		5.0	7.0
Power Source				Single phase, ~230V, 50Hz	
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	43/37/33/26	49/42/37/33
	Heating			42/37/33/25	48/42/37/33
Sound Power Level	Cooling	H	dB(A)	58	64
	Heating			58	64
Airflow Rate	Cooling	H/M/L/Q	m³/h	900/740/620/550	1,120/900/740/620
	Heating			900/740/620/550	1,100/900/740/620
Net Dimensions			mm	320 × 998 × 238	
Weight			kg(lbs)	14 (31)	
Connection Pipe Diameter		Liquid/Gas	mm	6.35/12.70	
				6.35/15.88	

Compact wall mounted



Model No.	Indoor unit			ASYG07LMCE	ASYG09LMCE	ASYG12LMCE	ASYG14LMCE
kW Class		kW		2.0	2.5	3.5	4.0
Power Source				Single phase, ~230V, 50Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	36/32/29/21	37/33/29/21	40/36/30/21	42/38/33/25
	Heating			36/32/29/22	37/33/29/22	40/36/31/22	42/38/35/27
Sound Power Level	Cooling	H	dB(A)	51	52	54	56
	Heating			51	52	55	57
Airflow Rate	Cooling	H/M/L/Q	m³/h	560/500/430/310	600/520/430/310	660/560/450/310	730/600/530/360
	Heating			560/500/430/330	600/520/430/330	660/560/470/330	730/615/560/375
Net Dimensions			mm	270 × 870 × 204	270 × 870 × 204	270 × 870 × 204	270 × 870 × 204
Weight			kg(lbs)	8.5 (19)	8.5 (19)	8.5 (19)	8.5 (19)
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70

Floor



Model No.	Indoor unit			AGYG09LVCA	AGYG12LVCA	AGYG14LVCA
kW Class		kW		2.5	3.5	4.0
Power Source				Single phase, ~230V, 50Hz		
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	39/34/28/22	42/36/30/22	44/38/31/22
	Heating			39/35/30/22	42/38/32/22	44/39/33/22
Sound Power Level	Cooling	H	dB(A)	52	55	56
	Heating			52	55	56
Airflow Rate	Cooling	H/M/L/Q	m³/h	530/440/380/270	600/490/380/270	650/520/400/270
	Heating			530/460/380/270	600/510/410/270	650/540/430/270
Net Dimensions			mm	600 × 740 × 200	600 × 740 × 200	600 × 740 × 200
Weight			kg(lbs)	14 (31)	14 (31)	14 (31)
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/12.70

Floor ceiling



Model No.	Indoor unit			ABYG14LVTA	ABYG18LVTB
kW Class		kW		4.0	5.0
Power Source				Single phase, ~230V, 50Hz	
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	36/34/33/29 (Under ceiling) 39/37/36/32 (Floor console)	41/38/34/32 (Under ceiling) 44/41/37/35 (Floor console)
	Heating			36/34/33/29 (Under ceiling) 39/37/36/32 (Floor console)	41/38/34/32 (Under ceiling) 44/41/37/35 (Floor console)
Sound Power Level	Cooling	H	dB(A)	51	55
	Heating			51	55
Airflow Rate	Cooling	H/M/L/Q	m³/h	640/590/540/480	780/700/560/500
	Heating			640/590/540/480	780/700/560/500
Net Dimensions			mm	199 × 990 × 655	
Weight			kg(lbs)	27 (60)	
Connection Pipe Diameter		Liquid/Gas	mm	6.35/12.70	

Compact cassette




Model No.	Indoor unit			AUYG07LVLA	AUYG09LVLA	AUYG12LVLB	AUYG14LVLB	AUYG18LVLB
kW Class		kW		2.0	2.5	3.5	4.0	5.0
Power Source				Single phase, ~230V, 50Hz				
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	33/31/29/27	33/31/29/27	37/33/31/28	40/35/32/29	42/37/33/29
	Heating			34/32/29/27	34/32/29/27	37/33/31/28	40/37/34/29	44/40/37/30
Sound Power Level	Cooling	H	dB(A)	46	46	49	52	54
	Heating			47	47	49	52	56
Airflow Rate	Cooling	H/M/L/Q	m³/h	540/490/440/390	540/490/440/390	610/530/470/410	680/580/490/410	750/610/520/410
	Heating			540/490/440/390	540/490/440/390	610/530/470/410	700/620/550/430	800/710/600/450
Net Dimensions			mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
Weight			kg(lbs)	15(33)	15 (33)	15 (33)	15 (33)	15 (33)
Panel				UTG-UFYD-W				
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70	6.35/12.70

Mini duct



Model No.	Indoor unit			ARYG07LSLAP	ARYG09LSLAP	ARYG12LSLAP	ARYG14LSLAP	ARYG18LSLAP
kW Class		kW		2.0	2.5	3.5	4.0	5.0
Power Source				Single phase, ~230V, 50Hz				
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23	33/29/26/23
	Heating			29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23	33/29/26/23
Sound Power Level	Cooling	H	dB(A)	52	54	55	60	58
	Heating			53	56	57	62	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360	940/750/540/480
	Heating			550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360	940/750/540/480
Net Dimensions			mm	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 900 × 450
Weight			kg(lbs)	15.5 (33)				
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52			6.35/12.70	
External static pressure			Pa	0 to 30			0 to 50	
Drain pump				Standard				

Slim duct



Model No.	Indoor unit			ARYG07LLTA	ARYG09LLTA	ARYG12LLTB	ARYG14LLTB	ARYG18LLTB
kW Class			kW	2.0	2.5	3.5	4.0	5.0
Power Source				Single phase, ~230V, 50Hz				
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	28/26/25/24	28/27/26/25	29/28/27/26	32/30/28/26	32/31/30/29
	Heating			28/26/25/24	28/26/25/24	29/28/27/24	33/30/28/25	33/32/31/29
Sound Power Level	Cooling	H	dB(A)	57	57	58	60	58
	Heating			57	57	58	61	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
	Heating			550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
Net Dimensions			mm	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620
Weight			kg(lbs)	17 (37)	19 (42)	19 (42)	19 (42)	23 (51)
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.7	6.35/12.70
External static pressure			Pa	0 to 90				
Drain pump				Standard				



2-unit Multi-split Combination Table–Cooling/Heating

2-unit Multi-split cooling

AOYG14KBT A2	Combination of Indoor Unit		Cooling Operation							
			Cooling Capacity			Input Power (Min. - Max.)	EER	Seasonal Data		
			Unit 1	Unit 2	Total Capacity (Min. - Max.)			Pdesign	SEER	Energy efficiency class
2-unit connection	7	7	2.00	2.00	4.00(1.4-4.6)	0.97(0.25 - 1.20)	4.12	4.0	8.7	A+++
	7	9	1.75	2.25	4.00(1.4-4.6)	0.97(0.25 - 1.20)	4.12	4.0	8.7	A+++
	7	12	1.47	2.53	4.00(1.4-4.6)	0.97(0.25 - 1.20)	4.12	4.0	8.7	A+++
	9	9	2.00	2.00	4.00(1.4-4.6)	0.97(0.25 - 1.20)	4.12	4.0	8.7	A+++
	9	12	1.71	2.29	4.00(1.4-4.6)	0.97(0.25 - 1.20)	4.12	4.0	8.7	A+++

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h models
•The above is the value for connecting with Wall Mounted [KG] type.
•2 or more indoor units should be connected.
•Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).
•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
•The Total ability of connected indoor unit is up to 21000Btu from 14000Btu.

AOYG18KBT A2	Combination of Indoor Unit		Cooling Operation						Seasonal Data		
			Cooling Capacity			Input Power (Min. - Max.) kW	EER				
			Unit 1 kW	Unit 2 kW	Total Capacity (Min. - Max.) kW						
2-unit connection	7	7	2.00	2.00	4.00(1.7-5.0)	0.92(0.25 - 1.23)	4.35	4.0	8.8	A+++	
	7	9	2.00	2.50	4.50(1.7-5.7)	1.07(0.25 - 1.45)	4.22	4.5	8.7	A+++	
	7	12	1.84	3.16	5.00(1.7-5.8)	1.24(0.25 - 1.55)	4.03	5.0	8.6	A+++	
	7	14	1.67	3.33	5.00(1.7-5.8)	1.24(0.25 - 1.55)	4.03	5.0	8.6	A+++	
	9	9	2.50	2.50	5.00(1.7-5.8)	1.24(0.25 - 1.55)	4.03	5.0	8.6	A+++	
	9	12	2.14	2.86	5.00(1.7-5.8)	1.24(0.25 - 1.55)	4.03	5.0	8.6	A+++	
	9	14	1.96	3.04	5.00(1.7-5.8)	1.24(0.25 - 1.55)	4.03	5.0	8.6	A+++	
	12	12	2.50	2.50	5.00(1.7-5.8)	1.24(0.25 - 1.55)	4.03	5.0	8.6	A+++	
	12	14	2.31	2.69	5.00(1.7-5.8)	1.24(0.25 - 1.55)	4.03	5.0	8.6	A+++	

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h models
•The above is the value for connecting with Wall Mounted [KG] type.
•2 or more indoor units should be connected.
•Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).
•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
•The Total ability of connected indoor unit is up to 26000Btu from 14000Btu.

2-unit Multi-split heating

AOYG14KBT A2	Combination of Indoor Unit		Heating Operation							
			Heating Capacity			Input Power (Min. - Max.)	COP	Seasonal Data		
			Unit 1	Unit 2	Total Capacity (Min. - Max.)			Pdesign	SCOP	Energy efficiency class
2-unit connection	7	7	2.20	2.20	4.40(1.1-5.5)	0.95(0.25 - 1.65)	4.63	3.5	4.7	A++
	7	9	1.92	2.48	4.40(1.1-5.5)	0.95(0.25 - 1.65)	4.63	3.5	4.7	A++
	7	12	1.62	2.78	4.40(1.1-5.5)	0.95(0.25 - 1.65)	4.63	3.5	4.7	A++
	9	9	2.20	2.20	4.40(1.1-5.5)	0.95(0.25 - 1.65)	4.63	3.5	4.7	A++
	9	12	1.89	2.51	4.40(1.1-5.5)	0.95(0.25 - 1.65)	4.63	3.5	4.7	A++

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h models
•The above is the value for connecting with Wall Mounted [KG] type.
•2 or more indoor units should be connected.
•Heating capacity is based on 20°CDB (indoor temperature), 7°CDB/6°CWB (outdoor temperature).
•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
•The Total ability of connected indoor unit is up to 21000Btu from 14000Btu.

AOYG18KBT A2	Combination of Indoor Unit		Heating Operation						Seasonal Data		
			Heating Capacity			Input Power (Min. - Max.) kW	COP				
			Unit 1 kW	Unit 2 kW	Total Capacity (Min. - Max.) kW						
2-unit connection	7	7	2.40	2.40	4.80(1.7-5.6)	0.99(0.25 - 1.35)	4.85	3.8	4.7	A++	
	7	9	2.40	3.00	5.40(1.7-6.4)	1.15(0.25 - 1.60)	4.70	4.0	4.7	A++	
	7	12	2.06	3.54	5.60(1.7-7.0)	1.22(0.25 - 1.80)	4.59	4.2	4.7	A++	
	7	14	1.87	3.73	5.60(1.7-7.0)	1.22(0.25 - 1.80)	4.59	4.2	4.7	A++	
	9	9	2.80	2.80	5.60(1.7-7.0)	1.22(0.25 - 1.80)	4.59	4.2	4.7	A++	
	9	12	2.40	3.20	5.60(1.7-7.0)	1.22(0.25 - 1.80)	4.59	4.2	4.7	A++	
	9	14	2.19	3.41	5.60(1.7-7.0)	1.22(0.25 - 1.80)	4.59	4.2	4.7	A++	
	12	12	2.80	2.80	5.60(1.7-7.0)	1.22(0.25 - 1.80)	4.59	4.2	4.7	A++	
	12	14	2.58	3.02	5.60(1.7-7.0)	1.22(0.25 - 1.80)	4.59	4.2	4.7	A++	

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h models
•The above is the value for connecting with Wall Mounted [KG] type.
•2 or more indoor units should be connected.
•Heating capacity is based on 20°CDB (indoor temperature), 7°CDB/6°CWB (outdoor temperature).
•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
•The Total ability of connected indoor unit is up to 26000Btu from 14000Btu.



3-unit Multi-split Combination Table–Cooling/Heating

3-unit Multi-split cooling

AOYG18KBTA3	Combination of Indoor Unit			Cooling Operation							Seasonal Data		
				Cooling Capacity				Input Power (Min. - Max.)	EER				
				Unit 1	Unit 2	Unit 3	Total Capacity (Min. - Max.)			Pdesign	SEER	Energy efficiency	
2-unit connection	7	7	-	2.00	2.00	-	4.00(1.8-5.0)	0.86(0.35-1.35)	4.65	4.0	8.3	A++	
	7	9	-	2.00	2.50	-	4.50(1.8-5.7)	1.03(0.35-1.54)	4.36	4.5	8.2	A++	
	7	12	-	1.99	3.41	-	5.40(1.8-6.8)	1.41(0.35-1.85)	3.83	5.4	8.0	A++	
	7	14	-	1.80	3.60	-	5.40(1.8-7.0)	1.41(0.35-1.90)	3.83	5.4	8.0	A++	
	9	9	-	2.50	2.50	-	5.00(1.8-6.4)	1.23(0.35-1.74)	4.06	5.0	8.1	A++	
	9	12	-	2.31	3.09	-	5.40(1.8-7.0)	1.41(0.35-1.90)	3.83	5.4	8.0	A++	
	9	14	-	2.11	3.29	-	5.40(1.8-7.0)	1.41(0.35-1.90)	3.83	5.4	8.0	A++	
	12	12	-	2.70	2.70	-	5.40(1.8-7.0)	1.41(0.35-1.90)	3.83	5.4	8.0	A++	
	12	14	-	2.49	2.91	-	5.40(1.8-7.0)	1.41(0.35-1.90)	3.83	5.4	8.0	A++	
	14	14	-	2.70	2.70	-	5.40(1.8-7.0)	1.41(0.35-1.90)	3.83	5.4	8.0	A++	
3-unit connection	7	7	7	1.80	1.80	1.80	5.40(1.8-7.0)	1.13(0.35-1.90)	4.78	5.4	8.6	A+++	
	7	7	9	1.64	1.64	2.12	5.40(1.8-7.0)	1.13(0.35-1.90)	4.78	5.4	8.6	A+++	
	7	7	12	1.45	1.45	2.50	5.40(1.8-7.0)	1.13(0.35-1.90)	4.78	5.4	8.6	A+++	
	7	7	14	1.35	1.35	2.70	5.40(1.8-7.0)	1.13(0.35-1.90)	4.78	5.4	8.6	A+++	
	7	9	9	1.52	1.94	1.94	5.40(1.8-7.0)	1.13(0.35-1.90)	4.78	5.4	8.6	A+++	
	7	9	12	1.35	1.74	2.31	5.40(1.8-7.0)	1.13(0.35-1.90)	4.78	5.4	8.6	A+++	
	7	9	14	1.26	1.62	2.52	5.40(1.8-7.0)	1.13(0.35-1.90)	4.78	5.4	8.6	A+++	
	9	9	9	1.80	1.80	1.80	5.40(1.8-7.0)	1.13(0.35-1.90)	4.78	5.4	8.6	A+++	
	9	9	12	1.62	1.62	2.16	5.40(1.8-7.0)	1.13(0.35-1.90)	4.78	5.4	8.6	A+++	
	9	9	14	1.52	1.52	2.28	5.40(1.8-7.0)	1.13(0.35-1.90)	4.78	5.4	8.6	A+++	

AOYG24KBTA3	Combination of Indoor Unit			Cooling Operation							Seasonal Data		
				Cooling Capacity			Total Capacity (Min. - Max.) kW	Input Power (Min. - Max.) kW	EER				
				Unit 1 kW	Unit 2 kW	Unit 3 kW							
2-unit connection	7	7	-	2.00	2.00	-	4.00(1.8-5.0)	0.86(0.35-1.35)	4.65	4.0	8.3	A++	
	7	9	-	2.00	2.50	-	4.50(1.8-5.7)	1.03(0.35-1.54)	4.36	4.5	8.2	A++	
	7	12	-	2.00	3.50	-	5.50(1.8-6.8)	1.46(0.35-1.85)	3.77	5.5	8.0	A++	
	7	14	-	2.00	4.00	-	6.00(1.8-7.5)	1.73(0.35-2.20)	3.48	6.0	7.6	A++	
	7	18	-	1.90	4.90	-	6.80(1.8-8.5)	2.26(0.35-2.65)	3.01	6.8	6.9	A++	
	9	9	-	2.50	2.50	-	5.00(1.8-6.4)	1.23(0.35-1.74)	4.06	5.0	8.1	A++	
	9	12	-	2.50	3.50	-	6.00(1.8-7.5)	1.73(0.35-2.20)	3.48	6.0	7.6	A++	
	9	14	-	2.50	4.00	-	6.50(1.8-8.2)	2.04(0.35-2.46)	3.19	6.5	7.2	A++	
	9	18	-	2.27	4.53	-	6.80(1.8-8.5)	2.26(0.35-2.65)	3.01	6.8	6.9	A++	
	12	12	-	3.40	3.40	-	6.80(1.8-8.5)	2.26(0.35-2.65)	3.01	6.8	6.9	A++	
3-unit connection	12	14	-	3.14	3.66	-	6.80(1.8-8.5)	2.26(0.35-2.65)	3.01	6.8	6.9	A++	
	12	18	-	2.72	4.08	-	6.80(1.8-8.5)	2.26(0.35-2.65)	3.01	6.8	6.9	A++	
	14	14	-	3.40	3.40	-	6.80(1.8-8.5)	2.26(0.35-2.65)	3.01	6.8	6.9	A++	
	14	18	-	2.98	3.82	-	6.80(1.8-8.5)	2.26(0.35-2.65)	3.01	6.8	6.9	A++	
	7	7	7	2.00	2.00	2.00	6.00(1.8-7.5)	1.37(0.35-2.20)	4.37	6.0	8.6	A+++	
	7	7	9	2.00	2.00	2.50	6.50(1.8-8.2)	1.59(0.35-2.46)	4.08	6.5	8.5	A+++	
	7	7	12	1.83	1.83	3.14	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	7	7	14	1.70	1.70	3.40	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	7	7	18	1.49	1.49	3.82	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	7	9	9	1.90	2.45	2.45	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	7	9	12	1.70	2.19	2.91	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	7	9	14	1.59	2.04	3.17	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	7	9	18	1.40	1.80	3.60	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	7	12	12	1.54	2.63	2.63	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	7	12	14	1.44	2.47	2.89	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	7	14	14	1.36	2.72	2.72	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	9	9	9	2.27	2.27	2.27	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	9	9	12	2.04	2.04	2.72	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	9	9	14	1.91	1.91	2.98	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	9	9	18	1.70	1.70	3.40	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	9	12	12	1.86	2.47	2.47	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	9	12	14	1.75	2.33	2.72	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	
	12	12	12	2.27	2.27	2.27	6.80(1.8-8.5)	1.74(0.35-2.65)	3.90	6.8	8.5	A+++	

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h / 18:18000Btu/h models
•The above is the value for connecting with Wall Mounted type.
•2 or more indoor units should be connected.
•Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).
•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
•The total ability of connectable indoor units is up to 36000Btu from 14000Btu.

3-unit Multi-split heating

AOYG18KBTA3	Combination of Indoor Unit			Heating Operation							Seasonal Data		
				Heating Capacity				Input Power (Min. - Max.) kW	COP				
				Unit 1 kW	Unit 2 kW	Unit 3 kW	Total Capacity (Min. - Max.) kW						
2-unit connection	7	7	-	2.40	2.40	-	4.80(2.0-5.6)	1.00(0.25-1.30)	4.80	4.0	4.2	A+	
	7	9	-	2.40	3.00	-	5.40(2.0-6.4)	1.21(0.25-1.48)	4.45	4.0	4.2	A+	
	7	12	-	2.40	4.20	-	6.60(2.0-7.6)	1.66(0.25-1.76)	3.98	5.0	4.0	A+	
	7	14	-	2.27	4.53	-	6.80(2.0-8.0)	1.77(0.25-1.85)	3.84	5.0	4.0	A+	
	9	9	-	3.00	3.00	-	6.00(2.0-7.2)	1.44(0.25-1.67)	4.17	4.5	4.1	A+	
	9	12	-	2.91	3.89	-	6.80(2.0-8.0)	1.77(0.25-1.85)	3.84	5.0	4.0	A+	
	9	14	-	2.66	4.14	-	6.80(2.0-8.0)	1.77(0.25-1.85)	3.84	5.0	4.0	A+	
	12	12	-	3.40	3.40	-	6.80(2.0-8.0)	1.77(0.25-1.85)	3.84	5.0	4.0	A+	
	12	14	-	3.14	3.66	-	6.80(2.0-8.0)	1.77(0.25-1.85)	3.84	5.0	4.0	A+	
	14	14	-	3.40	3.40	-	6.80(2.0-8.0)	1.77(0.25-1.85)	3.84	5.0	4.0	A+	
3-unit connection	7	7	7	2.27	2.27	2.27	6.80(2.0-8.0)	1.39(0.25-1.85)	4.89	5.0	4.7	A++	
	7	7	9	2.07	2.07	2.66	6.80(2.0-8.0)	1.39(0.25-1.85)	4.89	5.0	4.7	A++	
	7	7	12	1.83	1.83	3.14	6.80(2.0-8.0)	1.39(0.25-1.85)	4.89	5.0	4.7	A++	
	7	7	14	1.70	1.70	3.40	6.80(2.0-8.0)	1.39(0.25-1.85)	4.89	5.0	4.7	A++	
	7	9	9	1.90	2.45	2.45	6.80(2.0-8.0)	1.39(0.25-1.85)	4.89	5.0	4.7	A++	
	7	9	12	1.70	2.19	2.91	6.80(2.0-8.0)	1.39(0.25-1.85)	4.89	5.0	4.7	A++	
	7	9	14	1.59	2.04	3.17	6.80(2.0-8.0)	1.39(0.25-1.85)	4.89	5.0	4.7	A++	
	9	9	9	2.27	2.27	2.27	6.80(2.0-8.0)	1.39(0.25-1.85)	4.89	5.0	4.7	A++	
	9	9	12	2.04	2.04	2.72	6.80(2.0-8.0)	1.39(0.25-1.85)	4.89	5.0	4.7	A++	
	9	9	14	1.83	2.27	2.91	6.80(2.0-8.0)	1.39(0.25-1.85)	4.89	5.0	4.7	A++	

AOYG24KBTA3	Combination of Indoor Unit			Heating Operation								
				Heating Capacity				Input Power (Min. - Max.)	COP	Seasonal Data		
				Unit 1 kW	Unit 2 kW	Unit 3 kW	Total Capacity (Min. - Max.) kW			Pdesign kW	SCOP	Energy efficiency
2-unit connection	7	7	-	2.40	2.40	-	4.80(2.0-5.6)	1.00(0.25-1.30)	4.80	4.0	4.2	A+
	7	9	-	2.40	3.00	-	5.40(2.0-6.4)	1.21(0.25-1.48)	4.45	4.0	4.2	A+
	7	12	-	2.40	4.20	-	6.60(2.0-7.6)	1.66(0.25-1.76)	3.98	5.0	4.0	A+
	7	14	-	2.40	4.80	-	7.20(2.0-8.4)	1.86(0.25-2.07)	3.87	5.4	4.0	A+
	7	18	-	2.16	5.54	-	7.70(2.0-9.2)	2.01(0.25-2.35)	3.83	5.8	4.0	A+
	9	9	-	3.00	3.00	-	6.00(2.0-7.2)	1.44(0.25-1.67)	4.17	4.5	4.1	A+
	9	12	-	3.00	4.20	-	7.20(2.0-8.4)	1.86(0.25-2.07)	3.87	5.4	4.0	A+
	9	14	-	2.96	4.74	-	7.70(2.0-9.2)	2.01(0.25-2.35)	3.83	5.8	4.0	A+
	9	18	-	2.57	5.13	-	7.70(2.0-9.2)	2.01(0.25-2.35)	3.83	5.8	4.0	A+
	12	12	-	3.85	3.85	-	7.70(2.0-9.2)	2.01(0.25-2.35)	3.83	5.8	4.0	A+
3-unit connection	12	14	-	3.55	4.15	-	7.70(2.0-9.2)	2.01(0.25-2.35)	3.83	5.8	4.0	A+
	12	18	-	3.08	4.62	-	7.70(2.0-9.2)	2.01(0.25-2.35)	3.83	5.8	4.0	A+
	14	14	-	3.85	3.85	-	7.70(2.0-9.2)	2.01(0.25-2.35)	3.83	5.8	4.0	A+
	14	18	-	3.37	4.33	-	7.70(2.0-9.2)	2.01(0.25-2.35)	3.83	5.8	4.0	A+
	7	7	7	2.40	2.40	2.40	7.20(2.0-8.4)	1.61(0.25-2.07)	4.48	5.4	4.7	A++
	7	7	9	2.40	2.40	3.00	7.80(2.0-9.2)	1.76(0.25-2.35)	4.42	5.8	4.6	A++
	7	7	12	2.15	2.15	3.70	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++
	7	7	14	2.00	2.00	4.00	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++
	7	7	18	1.75	1.75	4.50	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++
	7	9	9	2.24	2.88	2.88	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++
	7	9	12	2.00	2.57	3.43	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++
	7	9	14	1.87	2.40	3.73	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++
	7	9	18	1.65	2.12	4.23	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++
	7	12	12	1.80	3.10	3.10	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++
	7	12	14	1.70	2.91	3.39	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++
	7	14	14	1.60	3.20	3.20	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++
	9	9	9	2.67	2.67	2.67	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++
	9	9	12	2.40	2.40	3.20	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++
9	9	14	2.25	2.25	3.50	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++	
9	9	18	2.00	2.00	4.00	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++	
9	12	12	2.18	2.91	2.91	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++	
9	12	14	2.06	2.74	3.20	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++	
12	12	12	2.67	2.67	2.67	8.00(2.0-9.2)	1.82(0.25-2.35)	4.40	6.0	4.6	A++	

4-unit Multi-split Combination Table-Cooling/Heating

4-unit Multi-split cooling

AOYG30KBT4	Combination of Indoor Unit				Cooling Operation							Seasonal Data		
					Cooling Capacity				Total Capacity (Min. - Max.)	Input Power (Min. - Max.)	EER			
					Unit 1	Unit 2	Unit 3	Unit 4						
				kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
2-unit connection	7	22	-	-	2.00	6.00	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	7	24	-	-	1.81	6.19	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	9	22	-	-	2.32	5.68	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	9	24	-	-	2.18	5.82	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	12	18	-	-	3.20	4.80	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	12	22	-	-	2.82	5.18	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	12	24	-	-	2.67	5.33	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	14	18	-	-	3.50	4.50	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	14	22	-	-	3.11	4.89	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	14	24	-	-	2.95	5.05	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	18	18	-	-	4.00	4.00	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	18	22	-	-	3.60	4.40	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	18	24	-	-	3.43	4.57	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	22	22	-	-	4.00	4.00	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	22	24	-	-	3.83	4.17	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
	24	24	-	-	4.00	4.00	-	-	8.00(2.4-10.1)	2.67(0.45-3.25)	3.00	8.0	7.5	A++
3-unit connection	7	7	12	-	2.00	2.00	3.50	-	7.50(2.4-9.3)	2.10(0.45-2.84)	3.57	7.5	8.1	A++
	7	7	14	-	2.00	2.00	4.00	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	7	18	-	1.75	1.75	4.50	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	7	22	-	1.56	1.56	4.88	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	7	24	-	1.47	1.47	5.06	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	9	9	-	2.00	2.50	2.50	-	7.00(2.4-8.9)	1.90(0.45-2.65)	3.69	7.0	8.2	A++
	7	9	12	-	2.00	2.50	3.50	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	9	14	-	1.87	2.40	3.73	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	9	18	-	1.64	2.12	4.24	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	9	22	-	1.47	1.89	4.64	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	9	24	-	1.40	1.80	4.80	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	12	12	-	1.80	3.10	3.10	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	12	14	-	1.70	2.91	3.39	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	12	18	-	1.51	2.59	3.90	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	12	22	-	1.37	2.34	4.29	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	12	24	-	1.30	2.23	4.47	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	14	14	-	1.60	3.20	3.20	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	14	18	-	1.44	2.87	3.69	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	14	22	-	1.30	2.60	4.10	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	14	24	-	1.24	2.49	4.27	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	18	18	-	1.30	3.35	3.35	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	18	22	-	1.19	3.06	3.75	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	7	18	24	-	1.14	2.94	3.92	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
4-unit connection	9	9	9	-	2.50	2.50	2.50	-	7.50(2.4-9.6)	2.10(0.45-3.01)	3.57	7.5	8.1	A++
	9	9	12	-	2.40	2.40	3.20	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	9	9	14	-	2.25	2.25	3.50	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	9	9	18	-	2.00	2.00	4.00	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	9	9	22	-	1.80	1.80	4.40	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	9	9	24	-	1.71	1.71	4.58	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	9	12	12	-	2.18	2.91	2.91	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	9	12	14	-	2.06	2.74	3.20	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	9	12	18	-	1.85	2.46	3.69	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	9	12	22	-	1.67	2.23	4.10	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	9	12	24	-	1.60	2.13	4.27	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	9	14	14	-	1.94	3.03	3.03	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	9	14	18	-	1.76	2.73	3.51	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	9	14	22	-	1.60	2.49	3.91	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	9	14	24	-	1.53	2.38	4.09	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	12	12	12	-	2.67	2.67	2.67	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	12	12	14	-	2.53	2.53	2.94	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	12	12	18	-	2.29	2.29	3.42	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	12	12	22	-	2.09	2.09	3.82	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	12	12	24	-	2.00	2.00	4.00	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	12	14	14	-	2.40	2.80	2.80	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	12	14	18	-	2.18	2.55	3.27	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	12	18	18	-	2.00	3.00	3.00	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	14	14	14	-	2.67	2.67	2.67	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	14	14	18	-	2.43	2.43	3.14	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
4-unit connection	7	7	7	7	2.00	2.00	2.00	2.00	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	7	9	1.87	1.87	1.87	2.39	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	7	12	1.70	1.70	1.70	2.90	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	7	14	1.60	1.60	1.60	3.20	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	7	18	1.44	1.44	1.44	3.68	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	9	9	1.75	1.75	2.25	2.25	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	9	12	1.60	1.60	2.06	2.74	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	9	14	1.51	1.51	1.95	3.03	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	9	18	1.37	1.37	1.76	3.50	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	12	12	1.47	1.47	2.53	2.53	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	12	14	1.40	1.40	2.40	2.80	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	12	18	1.27	1.27	2.18	3.28	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	14	14	1.33	1.33	2.67	2.67	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	14	18	1.22	1.22	2.43	3.13	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	9	9	9	1.64	2.12	2.12	2.12	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	9	9	12	1.51	1.95	1.95	2.59	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	9	9	14	1.43	1.85	1.85	2.87	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	9	9	18	1.30	1.67	1.67	3.36	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	9	12	12	1.40	1.80	2.40	2.40	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
	7	9	12	14	1.33	1.71	2.29	2.67	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++
7	9	12	18	1.50	1.50	2.00	3.00	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++	
7	9	14	14	1.26	1.64	2.55	2.55	8.00(2.4-10.1)	2.05(0.45-3.25)	3.90	8.0	8.5	A+++	
7	9	14	18	1.17	1.50	2.33	3.00	8.00(2.4-10.1)	2.05					



5-unit Multi-split Combination Table-Cooling

5-unit Multi-split cooling

AOYG36K8TA5	Combination of Indoor Unit					Cooling Operation											Seasonal Data			
						Cooling Capacity					Input Power (Min. - Max.)									
						Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Total Capacity (Min. - Max.)	Input Power (Min. - Max.)						EER	Pdesign	SEER
						kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	
2-unit connection	7	24	-	-	-	2.00	7.00	-	-	-	9.00(3.0-11.0)	2.91(0.30-3.45)	3.09	9.0	7.9	A++				
	9	22	-	-	-	2.50	6.00	-	-	-	8.50(3.0-11.0)	2.67(0.30-3.45)	3.18	8.5	7.9	A++				
	9	24	-	-	-	2.50	7.00	-	-	-	9.50(3.0-11.0)	3.17(0.30-3.45)	3.00	9.5	7.8	A++				
	12	22	-	-	-	3.50	6.00	-	-	-	9.50(3.0-11.0)	3.17(0.30-3.45)	3.00	9.5	7.8	A++				
	12	24	-	-	-	3.17	6.33	-	-	-	9.50(3.0-11.0)	3.17(0.30-3.45)	3.00	9.5	7.8	A++				
	14	22	-	-	-	3.69	5.81	-	-	-	9.50(3.0-11.0)	3.17(0.30-3.45)	3.00	9.5	7.8	A++				
	14	24	-	-	-	3.50	6.00	-	-	-	9.50(3.0-11.0)	3.17(0.30-3.45)	3.00	9.5	7.8	A++				
	18	18	-	-	-	4.75	4.75	-	-	-	9.50(3.0-11.0)	3.17(0.30-3.45)	3.00	9.5	7.8	A++				
	18	22	-	-	-	4.27	5.23	-	-	-	9.50(3.0-11.0)	3.17(0.30-3.45)	3.00	9.5	7.8	A++				
	18	24	-	-	-	4.07	5.43	-	-	-	9.50(3.0-11.0)	3.17(0.30-3.45)	3.00	9.5	7.8	A++				
	22	22	-	-	-	4.75	4.75	-	-	-	9.50(3.0-11.0)	3.17(0.30-3.45)	3.00	9.5	7.8	A++				
	22	24	-	-	-	4.54	4.96	-	-	-	9.50(3.0-11.0)	3.17(0.30-3.45)	3.00	9.5	7.8	A++				
	24	24	-	-	-	4.75	4.75	-	-	-	9.50(3.0-11.0)	3.17(0.30-3.45)	3.00	9.5	7.8	A++				
	7	7	14	-	-	2.00	2.00	4.00	-	-	8.00(3.0-10.0)	2.26(0.30-2.88)	3.54	8.0	8.2	A++				
	7	7	18	-	-	2.00	2.00	5.00	-	-	9.00(3.0-11.0)	2.68(0.30-3.45)	3.36	9.0	8.1	A++				
	7	7	22	-	-	1.85	1.85	5.80	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++				
7	7	24	-	-	1.75	1.75	6.00	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	9	12	-	-	2.00	2.50	3.50	-	-	8.00(3.0-10.0)	2.26(0.30-2.88)	3.54	8.0	8.2	A++					
7	9	14	-	-	2.00	2.50	4.00	-	-	8.50(3.0-10.7)	2.46(0.30-3.27)	3.45	8.5	8.1	A++					
7	9	18	-	-	2.00	2.50	5.00	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	9	22	-	-	1.75	2.25	5.50	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	9	24	-	-	1.66	2.14	5.70	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	12	12	-	-	2.00	3.50	3.50	-	-	9.00(3.0-11.0)	2.68(0.30-3.45)	3.36	9.0	8.1	A++					
7	12	14	-	-	2.00	3.50	4.00	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	12	18	-	-	1.80	3.08	4.62	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	12	22	-	-	1.62	2.78	5.10	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	12	24	-	-	1.55	2.65	5.30	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	14	14	-	-	1.90	3.80	3.80	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	14	18	-	-	1.71	3.41	4.38	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	14	22	-	-	1.55	3.09	4.86	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	14	24	-	-	1.47	2.96	5.07	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	18	18	-	-	1.54	3.98	3.98	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	18	22	-	-	1.41	3.64	4.45	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
7	18	24	-	-	1.36	3.49	4.65	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	9	9	-	-	2.50	2.50	2.50	-	-	7.50(3.0-9.6)	2.07(0.30-2.70)	3.63	7.5	8.2	A++					
9	9	12	-	-	2.50	2.50	3.50	-	-	8.50(3.0-10.7)	2.46(0.30-3.27)	3.45	8.5	8.1	A++					
9	9	14	-	-	2.50	2.50	4.00	-	-	9.00(3.0-11.0)	2.68(0.30-3.45)	3.36	9.0	8.1	A++					
9	9	18	-	-	2.38	2.38	4.74	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	9	22	-	-	2.14	2.14	5.22	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	9	24	-	-	2.04	2.04	5.42	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	12	12	-	-	2.50	3.50	3.50	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	12	14	-	-	2.44	3.26	3.80	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	12	18	-	-	2.19	2.92	4.39	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	12	22	-	-	1.99	2.65	4.86	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	12	24	-	-	1.90	2.53	5.07	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	14	14	-	-	2.32	3.59	3.59	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	14	18	-	-	2.09	3.24	4.17	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	14	22	-	-	1.90	2.96	4.64	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	14	24	-	-	1.82	2.83	4.85	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	18	18	-	-	1.90	3.80	3.80	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	18	22	-	-	1.74	3.49	4.27	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
9	18	24	-	-	1.68	3.35	4.47	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
12	12	12	-	-	3.17	3.17	3.17	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
12	12	14	-	-	3.00	3.00	3.50	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
12	12	18	-	-	2.71	2.71	4.08	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
12	12	22	-	-	2.48	2.48	4.54	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
12	12	24	-	-	2.38	2.38	4.74	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
12	14	14	-	-	2.84	3.33	3.33	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
12	14	18	-	-	2.59	3.02	3.89	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
12	14	22	-	-	2.38	2.77	4.42	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
12	14	24	-	-	2.28	2.66	4.56	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
12	18	18	-	-	2.38	3.56	3.56	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
12	18	22	-	-	2.19	3.29	4.02	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
12	18	24	-	-	2.11	3.17	4.22	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
14	14	14	-	-	3.17	3.17	3.17	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
14	14	18	-	-	2.89	2.89	3.72	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
14	14	22	-	-	2.66	2.66	4.18	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
14	14	24	-	-	2.56	2.56	4.38	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
14	18	18	-	-	2.66	3.42	3.42	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
18	18	18	-	-	3.17	3.17	3.17	-	-	9.50(3.0-11.0)	2.91(0.30-3.45)	3.27	9.5	8.0	A++					
4-unit connection	7	7	7	7	-	2.00	2.00	2.00	2.00	-	8.00(3.0-10.0)	2.11(0.30-2.88)	3.80	8.0	8.5	A+++				
	7	7	7	9	-	2.00	2.00	2.00	2.50	-	8.50(3.0-10.7)	2.29(0.30-3.27)	3.71	8.5	8.4	A++				
	7	7	7	12	-	2.00	2.00	2.00	3.50	-	9.50(3.0-11.0)	2.69(0.30-3.45)	3.53	9.5	8.3	A++				



5-unit Multi-split Combination Table-Heating

5-unit Multi-split heating

AOYG36K8TA5	Combination of Indoor Unit					Heating Operation										Seasonal Data		
						Heating Capacity					Input Power (Min. - Max.)	COP	Pdesign kW	SCOP	Energy efficiency			
						Unit 1	Unit 2	Unit 3	Unit 4	Unit 5								
2-unit connection	7	24	-	-	-	2.39	8.21	-	-	-	10.60(3.5-12.0)	2.65(0.25-3.25)	4.00	7.0	4.3	A+		
	9	22	-	-	-	3.00	7.20	-	-	-	10.20(3.5-12.0)	2.52(0.25-3.25)	4.04	6.8	4.3	A+		
	9	24	-	-	-	2.89	7.71	-	-	-	10.60(3.5-12.0)	2.65(0.25-3.25)	4.00	7.0	4.3	A+		
	12	22	-	-	-	3.74	6.86	-	-	-	10.60(3.5-12.0)	2.65(0.25-3.25)	4.00	7.0	4.3	A+		
	12	24	-	-	-	3.53	7.07	-	-	-	10.60(3.5-12.0)	2.65(0.25-3.25)	4.00	7.0	4.3	A+		
	14	22	-	-	-	4.12	6.48	-	-	-	10.60(3.5-12.0)	2.65(0.25-3.25)	4.00	7.0	4.3	A+		
	14	24	-	-	-	3.91	6.69	-	-	-	10.60(3.5-12.0)	2.65(0.25-3.25)	4.00	7.0	4.3	A+		
	18	18	-	-	-	5.30	5.30	-	-	-	10.60(3.5-12.0)	2.65(0.25-3.25)	4.00	7.0	4.3	A+		
	18	22	-	-	-	4.77	5.83	-	-	-	10.60(3.5-12.0)	2.65(0.25-3.25)	4.00	7.0	4.3	A+		
	18	24	-	-	-	4.54	6.06	-	-	-	10.60(3.5-12.0)	2.65(0.25-3.25)	4.00	7.0	4.3	A+		
	22	22	-	-	-	5.30	5.30	-	-	-	10.60(3.5-12.0)	2.65(0.25-3.25)	4.00	7.0	4.3	A+		
	22	24	-	-	-	5.07	5.53	-	-	-	10.60(3.5-12.0)	2.65(0.25-3.25)	4.00	7.0	4.3	A+		
	24	24	-	-	-	5.30	5.30	-	-	-	10.60(3.5-12.0)	2.65(0.25-3.25)	4.00	7.0	4.3	A+		
	7	7	14	-	-	2.40	2.40	4.80	-	-	9.60(3.5-11.2)	2.25(0.25-2.87)	4.26	6.5	4.5	A+		
	7	7	18	-	-	2.32	2.32	5.96	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+		
	7	7	22	-	-	2.06	2.06	6.48	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+		
	7	7	24	-	-	1.95	1.95	6.70	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+		
	7	9	12	-	-	2.40	3.00	4.20	-	-	9.60(3.5-11.2)	2.25(0.25-2.87)	4.26	6.5	4.5	A+		
	7	9	14	-	-	2.40	3.00	4.80	-	-	10.20(3.5-12.0)	2.42(0.25-3.25)	4.21	6.8	4.4	A+		
	7	9	18	-	-	2.18	2.81	5.61	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+		
7	9	22	-	-	1.95	2.51	6.14	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
7	9	24	-	-	1.85	2.39	6.36	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
7	12	12	-	-	2.40	4.10	4.10	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
7	12	14	-	-	2.25	3.85	4.50	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
7	12	18	-	-	2.00	3.44	5.16	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
7	12	22	-	-	1.81	3.10	5.69	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
7	12	24	-	-	1.72	2.96	5.92	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
7	14	14	-	-	2.12	4.24	4.24	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
7	14	18	-	-	1.90	3.81	4.89	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
7	14	22	-	-	1.73	3.45	5.42	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
7	14	24	-	-	1.65	3.30	5.65	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
7	18	18	-	-	1.72	4.44	4.44	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
7	18	22	-	-	1.58	4.06	4.96	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
7	18	24	-	-	1.51	3.89	5.20	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	9	9	-	-	3.00	3.00	3.00	-	-	9.00(3.5-10.8)	2.09(0.25-2.70)	4.31	6.0	4.5	A+			
9	9	12	-	-	3.00	3.00	4.20	-	-	10.20(3.5-12.0)	2.42(0.25-3.25)	4.21	6.8	4.4	A+			
9	9	14	-	-	2.98	2.98	4.64	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	9	18	-	-	2.65	2.65	5.30	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	9	22	-	-	2.39	2.39	5.82	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	9	24	-	-	2.27	2.27	6.06	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	12	12	-	-	2.90	3.85	3.85	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	12	14	-	-	2.73	3.63	4.24	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	12	18	-	-	2.45	3.26	4.89	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	12	22	-	-	2.22	2.96	5.42	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	12	24	-	-	2.12	2.83	5.65	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	14	14	-	-	2.58	4.01	4.01	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	14	18	-	-	2.33	3.62	4.65	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	14	22	-	-	2.12	3.30	5.18	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	14	24	-	-	2.03	3.16	5.41	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	18	18	-	-	2.12	4.24	4.24	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	18	22	-	-	1.95	3.89	4.76	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
9	18	24	-	-	1.87	3.74	4.99	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
12	12	12	-	-	3.53	3.53	3.53	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
12	12	14	-	-	3.35	3.35	3.90	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
12	12	18	-	-	3.03	3.03	4.54	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
12	12	22	-	-	2.77	2.77	5.06	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
12	12	24	-	-	2.65	2.65	5.30	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
12	14	14	-	-	3.18	3.71	3.71	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
12	14	18	-	-	2.89	3.37	4.34	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
12	14	22	-	-	2.65	3.09	4.86	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
12	14	24	-	-	2.54	2.97	5.09	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
12	18	18	-	-	2.64	3.98	3.98	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
12	18	22	-	-	2.45	3.67	4.48	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
12	18	24	-	-	2.36	3.53	4.71	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
14	14	14	-	-	3.53	3.53	3.53	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
14	14	18	-	-	3.23	3.23	4.14	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
14	14	22	-	-	2.97	2.97	4.66	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
14	14	24	-	-	2.85	2.85	4.90	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
14	18	18	-	-	2.96	3.82	3.82	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
14	18	22	-	-	2.54	3.53	3.53	-	-	10.60(3.5-12.0)	2.54(0.25-3.25)	4.18	7.0	4.4	A+			
4-unit connection	7	7	7	7	2.40	2.40	2.40	2.40	-	9.60(3.5-11.2)	2.17(0.25-2.87)	4.42	6.5	4.6	A++			
	7	7	7	9	2.40	2.40	2.40	3.00	-	10.20(3.5-12.0)	2.33(0.25-3.25)	4.37	6.8	4.5	A+			
	7	7	7	12	2.25	2.25	2.25	3.85	-	10.60(3.5-12.0)	2.44(0.25-3.25)	4.34	7.0	4.5	A+			
	7	7	7	14	2.12	2.12	2.12	4.24	-	10.60(3.5-12.0)	2.44(0.25-3.25)	4.34	7.0	4.5	A+			
	7	7	7	18	1.90	1.90	1.90	4.90	-	10.60(3.5-12.0)	2.44(0.25-3.25)	4.34	7.0	4.5	A+			
	7	7	7	22	1.73	1.73	1.73	5.41	-	10.60(3.5-12.0)	2.44(0.25-3.25)	4.34	7.0	4.5	A+			
	7	7	7	24	1.65	1.65	1.65	5.65	-	10.60(3.5-12.0)	2.44(0.25-3.25)	4.34	7.0	4.5	A+			
	7	7	9	9	2.32	2.32	2.98	2.98	-	10.60(3.5-12.0)	2.44(0.25-3.25)	4.34	7.0	4.5	A+			
	7	7	9	12	2.12	2.12	2.73	3.63	-	10.60(3.5-12.0)	2.44(0.25-3.25)	4.34	7.0	4.5	A+			
	7	7	9	14	2.01	2.01	2.57	4.01	-	10.60(3.5-12.0)	2.44(0.25-3.25)	4.34	7.0	4.5	A+			
	7	7	9	18	1.81	1.81	2.33	4.65	-	10.60(3.5-12.0)	2.44(0.25-3.25)	4.34	7					

6-unit Multi-split Combination Table-Cooling

6-unit Multi-split cooling

AOYG45LBLA6	Combination of Indoor Unit						Cooling Operation						Input Power (Min. - Max.)	EER
							Cooling Capacity							
							Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6		
							kW	kW	kW	kW	kW	kW		
2-unit connection	12	24	-	-	-	-	3.50	7.00	-	-	-	10.5 (3.5-11.5)	3.06 (0.8-3.32)	3.43
	14	24	-	-	-	-	4.00	7.00	-	-	-	11.0 (3.5-12.1)	3.28 (0.8-3.70)	3.35
	18	18	-	-	-	-	5.00	5.00	-	-	-	10.0 (3.5-11.5)	2.92 (0.8-3.32)	3.42
	18	24	-	-	-	-	5.00	7.00	-	-	-	12.0 (3.5-13.4)	3.75 (0.8-4.46)	3.20
	24	24	-	-	-	-	6.25	6.25	-	-	-	12.5 (3.5-14.0)	4.01 (0.8-4.84)	3.12
	7	7	24	-	-	-	2.00	2.00	7.00	-	-	11.0 (3.5-12.1)	3.19 (0.8-3.70)	3.45
	7	9	18	-	-	-	2.00	2.50	5.00	-	-	9.5 (3.5-10.8)	2.55 (0.8-2.93)	3.73
	7	9	24	-	-	-	2.00	2.50	7.00	-	-	11.5 (3.5-12.7)	3.41 (0.8-4.08)	3.37
	7	12	18	-	-	-	2.00	3.50	5.00	-	-	10.5 (3.5-11.8)	3.02 (0.8-3.51)	3.48
	7	12	24	-	-	-	2.00	3.50	6.90	-	-	12.4 (3.5-13.7)	3.82 (0.8-4.65)	3.25
	7	14	14	-	-	-	2.00	4.00	4.00	-	-	10.0 (3.5-11.1)	2.81 (0.8-3.13)	3.56
	7	14	18	-	-	-	2.00	4.00	5.00	-	-	11.0 (3.5-12.4)	3.23 (0.8-3.89)	3.41
3-unit connection	7	14	24	-	-	-	1.94	3.89	6.67	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21
	7	18	18	-	-	-	2.00	5.00	5.00	-	-	12.0 (3.5-13.7)	3.69 (0.8-4.65)	3.25
	7	18	24	-	-	-	1.79	4.59	6.12	-	-	12.5 (3.5-14.0)	3.87 (0.8-4.84)	3.23
	7	24	24	-	-	-	1.60	5.45	5.45	-	-	12.5 (3.5-14.0)	3.83 (0.8-4.84)	3.26
	9	9	18	-	-	-	2.50	2.50	5.00	-	-	10.0 (3.5-11.5)	2.84 (0.8-3.32)	3.57
	9	9	24	-	-	-	2.50	2.50	7.00	-	-	12.0 (3.5-13.4)	3.65 (0.8-4.46)	3.29
	9	12	14	-	-	-	2.50	3.50	4.00	-	-	10.0 (3.5-11.1)	2.81 (0.8-3.13)	3.56
	9	12	18	-	-	-	2.50	3.50	5.00	-	-	11.0 (3.5-12.4)	3.23 (0.8-3.89)	3.41
	9	12	24	-	-	-	2.50	3.33	6.67	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21
	9	14	14	-	-	-	2.50	4.00	4.00	-	-	10.5 (3.5-11.8)	3.02 (0.8-3.51)	3.48
	9	14	18	-	-	-	2.50	4.00	5.00	-	-	11.5 (3.5-13.0)	3.45 (0.8-4.27)	3.33
	9	14	24	-	-	-	2.40	3.72	6.38	-	-	12.5 (3.5-14.0)	3.88 (0.8-4.84)	3.22
4-unit connection	9	18	18	-	-	-	2.50	5.00	5.00	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21
	9	18	24	-	-	-	2.21	4.41	5.88	-	-	12.5 (3.5-14.0)	3.86 (0.8-4.84)	3.24
	9	24	24	-	-	-	1.98	5.26	5.26	-	-	12.5 (3.5-14.0)	3.82 (0.8-4.84)	3.27
	12	12	12	-	-	-	3.50	3.50	3.50	-	-	10.5 (3.5-11.5)	2.98 (0.8-3.32)	3.52
	12	12	14	-	-	-	3.50	3.50	4.00	-	-	11.0 (3.5-12.1)	3.19 (0.8-3.70)	3.45
	12	12	18	-	-	-	3.50	3.50	5.00	-	-	12.0 (3.5-13.4)	3.65 (0.8-4.46)	3.29
	12	12	24	-	-	-	3.13	3.13	6.24	-	-	12.5 (3.5-14.0)	3.87 (0.8-4.84)	3.23
	12	14	14	-	-	-	3.50	4.00	4.00	-	-	11.5 (3.5-12.7)	3.41 (0.8-4.08)	3.37
	12	14	18	-	-	-	3.50	4.00	5.00	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21
	12	14	24	-	-	-	3.00	3.50	6.00	-	-	12.5 (3.5-14.0)	3.86 (0.8-4.84)	3.24
	12	18	18	-	-	-	3.12	4.69	4.69	-	-	12.5 (3.5-14.0)	3.87 (0.8-4.84)	3.23
	12	18	24	-	-	-	2.78	4.17	5.55	-	-	12.5 (3.5-14.0)	3.85 (0.8-4.84)	3.25
12	24	24	-	-	-	2.50	5.00	5.00	-	-	12.5 (3.5-14.0)	3.81 (0.8-4.84)	3.28	
14	14	14	-	-	-	4.00	4.00	4.00	-	-	12.0 (3.5-13.4)	3.65 (0.8-4.46)	3.29	
14	14	18	-	-	-	3.80	3.80	4.90	-	-	12.5 (3.5-14.0)	3.88 (0.8-4.84)	3.22	
14	14	24	-	-	-	3.37	3.37	5.76	-	-	12.5 (3.5-14.0)	3.85 (0.8-4.84)	3.25	
14	18	18	-	-	-	4.50	4.50	4.50	-	-	12.5 (3.5-14.0)	3.86 (0.8-4.84)	3.24	
14	18	24	-	-	-	3.13	4.02	5.35	-	-	12.5 (3.5-14.0)	3.83 (0.8-4.84)	3.26	
14	24	24	-	-	-	2.82	4.84	4.84	-	-	12.5 (3.5-14.0)	3.80 (0.8-4.84)	3.29	
18	18	18	-	-	-	4.17	4.17	4.17	-	-	12.5 (3.5-14.0)	3.85 (0.8-4.84)	3.25	
18	18	24	-	-	-	3.75	3.75	5.00	-	-	12.5 (3.5-14.0)	3.81 (0.8-4.84)	3.28	
7	7	7	14	-	-	2.00	2.00	2.00	4.00	-	10.0 (3.5-11.1)	2.50 (0.8-3.13)	4.00	
7	7	7	18	-	-	2.00	2.00	2.00	5.00	-	11.0 (3.5-12.4)	3.06 (0.8-3.89)	3.59	
7	7	7	24	-	-	1.94	1.94	1.94	6.68	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.32	
7	7	9	12	-	-	2.00	2.00	2.50	2.50	-	10.0 (3.5-11.1)	2.50 (0.8-3.13)	4.00	
7	7	9	14	-	-	2.00	2.00	2.50	4.00	-	10.5 (3.5-11.8)	2.79 (0.8-3.51)	3.76	
7	7	9	18	-	-	2.00	2.00	2.50	5.00	-	11.5 (3.5-13.0)	3.33 (0.8-4.27)	3.45	
7	7	9	24	-	-	1.86	1.86	2.39	6.39	-	12.5 (3.5-14.0)	3.75 (0.8-4.84)	3.33	
7	7	12	12	-	-	2.00	2.00	3.50	3.50	-	11.0 (3.5-12.1)	3.00 (0.8-3.70)	3.67	
7	7	12	14	-	-	2.00	2.00	3.50	4.00	-	11.5 (3.5-12.7)	3.27 (0.8-4.08)	3.52	
7	7	12	18	-	-	2.00	2.00	3.50	5.00	-	12.5 (3.5-14.0)	3.78 (0.8-4.84)	3.31	
7	7	12	24	-	-	1.75	1.75	3.00	6.00	-	12.5 (3.5-14.0)	3.76 (0.8-4.84)	3.34	
7	7	14	14	-	-	2.00	2.00	4.00	4.00	-	12.0 (3.5-13.4)	3.51 (0.8-4.46)	3.42	
7	7	14	18	-	-	1.90	1.90	3.80	4.90	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32	
7	7	14	24	-	-	1.68	1.68	3.37	5.77	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35	
7	7	18	18	-	-	1.75	1.75	4.50	4.50	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34	
7	7	18	24	-	-	1.56	1.56	4.02	5.36	-	12.5 (3.5-14.0)	3.70 (0.8-4.84)	3.38	
7	7	24	24	-	-	1.41	1.41	4.84	4.84	-	12.5 (3.5-14.0)	3.67 (0.8-4.84)	3.41	
7	9	9	9	-	-	2.00	2.50	2.50	2.50	-	9.5 (3.5-10.8)	2.31 (0.8-2.93)	4.11	
7	9	9	12	-	-	2.00	2.50	2.50	3.50	-	10.5 (3.5-11.8)	2.79 (0.8-3.51)	3.76	
7	9	9	14	-	-	2.00	2.50	2.50	4.00	-	11.0 (3.5-12.4)	3.06 (0.8-3.89)	3.59	
7	9	9	18	-	-	2.00	2.50	2.50	5.00	-	12.0 (3.5-13.7)	3.57 (0.8-4.65)	3.36	
7	9	9	24	-	-	1.79	2.30	2.30	6.11	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34	
7	9	12	12	-	-	2.00	2.50	3.50	3.50	-	11.5 (3.5-12.7)	3.27 (0.8-4.08)	3.52	
7	9	12	14	-	-	2.00	2.50	3.50	4.00	-	12.0 (3.5-13.4)	3.51 (0.8-4.46)	3.42	
7	9	12	18	-	-	1.90	2.45	3.26	4.89	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32	
7	9	12	24	-	-	1.68	2.16	2.88	5.78	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35	
7	9	14	14	-	-	2.00	2.50	4.00	4.00	-	12.5 (3.5-14.0)	3.78 (0.8-4.84)	3.31	
7	9	14	18	-	-	1.82	2.34	3.65	4.69	-	12.5 (3.5-14.0)	3.75 (0.8-4.84)	3.33	
7	9	14	24	-	-	1.62	2.08	3.24	5.56	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.37	
7	9	18	18	-	-	1.68	2.16	4.33	4.33	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35	
7	9	18	24	-	-	1.51	1.94	3.88	5.17	-	12.5 (3.5-14.0)	3.69 (0.8-4.84)	3.39	
7	12	12	12	-	-	1.90	3.50	3.50	3.50	-	12.4 (3.5-13.7)	3.69 (0.8-4.65)	3.36	
7	12	12	14	-	-	1.94	3.33	3.33	3.90	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32	
7	12	12	18	-	-	1.79	3.06	3.06	4.59	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34	
7	12	12	24	-	-	1.59	2.73	2.73	5.45	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.37	
7	12	14	14	-	-	1.87	3.19	3.72	4.72	-	12.5 (3.5-14.0)	3.75 (0.8-4.84)	3.33	
7	12	14	18	-	-	1.72	2.94	3.43	4.41	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35	
7	12	14	24	-	-	1.54	2.63	3.07	5.26	-	12.5 (3.5-14.0)	3.70 (0.8-4.84)	3.38	
7	12	18	18	-	-	1.59	2.73	4.09	4.09	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.37	
7	12	18	24	-	-	1.43	2.46	3.69	4.92	-	12.5 (3.5-14.0)	3.68 (0.8-4.84)	3.40	
7	14	14	14	-	-	1.79	3.57	3.57	3.57	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34	
7	14	14	18	-	-	1.65	3.30	3.30	4.25	-	12.5 (3.5-14.0)	3.72 (0.8-4.84)	3.36	
7	14	14	24	-	-	1.48	2.97	2.97	5.08	-	12.5 (3.5-14.0)	3.69 (0.8-4.84)	3.39	
7	14	18	18	-	-	1.53	3.07	3.95	3.95	-	12.5 (3.5-14.0)	3.70 (0.8-4.84)	3.38	
7	18	18	18	-	-	1.43	3.69	3.69	3.69	-	12.5 (3.5-14.0)	3.68 (0.8-4.84)	3.40	
9	9	9	9											



6-unit Multi-split Multi Combination Table–Cooling/Heating

6-unit Multi-split cooling

AOYG45LBLA6	Combination of Indoor Unit							Cooling Operation								Input Power (Min. - Max.)	EER				
								Cooling Capacity						Total Capacity (Min. - Max.)							
								Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6								
6-unit connection	7	7	7	7	7	7	kW	kW	kW	kW	kW	kW	kW	12.0 (3.5-13.4)	3.32 (0.8-4.46)	3.61					
							2.00	2.00	2.00	2.00	2.00	2.00	2.00				2.50	2.50	12.5 (3.5-14)	3.57 (0.8-4.84)	3.50
							1.86	1.86	1.86	1.86	1.86	3.20	3.20				12.5 (3.5-14)	3.55 (0.8-4.84)	3.52		
							1.79	1.79	1.79	1.79	1.79	3.55	3.55				12.5 (3.5-14)	3.54 (0.8-4.84)	3.53		
							1.65	1.65	1.65	1.65	1.65	4.25	4.25				12.5 (3.5-14)	3.51 (0.8-4.84)	3.56		
							1.48	1.48	1.48	1.48	1.48	5.10	5.10				12.5 (3.5-14)	3.48 (0.8-4.84)	3.59		
							1.90	1.90	1.90	1.90	2.45	2.45	12.5 (3.5-14)				3.56 (0.8-4.84)	3.51			
							1.79	1.79	1.79	1.79	2.29	3.05	12.5 (3.5-14)				3.54 (0.8-4.84)	3.53			
							1.72	1.72	1.72	1.72	2.20	3.42	12.5 (3.5-14)				3.53 (0.8-4.84)	3.54			
							1.59	1.59	1.59	1.59	2.05	4.09	12.5 (3.5-14)				3.50 (0.8-4.84)	3.57			
							1.43	1.43	1.43	1.43	1.85	4.93	12.5 (3.5-14)				3.47 (0.8-4.84)	3.60			
							1.68	1.68	1.68	1.68	2.89	2.89	12.5 (3.5-14)				3.52 (0.8-4.84)	3.55			
							1.62	1.62	1.62	1.62	2.78	3.24	12.5 (3.5-14)				3.51 (0.8-4.84)	3.56			
							1.51	1.51	1.51	1.51	2.59	3.87	12.5 (3.5-14)				3.48 (0.8-4.84)	3.59			
							1.56	1.56	1.56	1.56	3.13	3.13	12.5 (3.5-14)				3.50 (0.8-4.84)	3.57			
							1.46	1.46	1.46	1.46	2.92	3.74	12.5 (3.5-14)				3.47 (0.8-4.84)	3.60			
							1.82	1.82	1.82	2.34	2.34	2.34	12.5 (3.5-14)				3.55 (0.8-4.84)	3.52			
							1.72	1.72	1.72	2.21	2.21	2.92	12.5 (3.5-14)				3.53 (0.8-4.84)	3.54			
							1.65	1.65	1.65	2.12	2.12	3.31	12.5 (3.5-14)				3.51 (0.8-4.84)	3.56			
							1.54	1.54	1.54	1.97	1.97	3.94	12.5 (3.5-14)				3.49 (0.8-4.84)	3.58			
							1.62	1.62	1.62	2.08	2.78	2.78	12.5 (3.5-14)				3.51 (0.8-4.84)	3.56			
							1.56	1.56	1.56	2.01	2.68	3.13	12.5 (3.5-14)				3.50 (0.8-4.84)	3.57			
							1.46	1.46	1.46	1.88	2.50	3.74	12.5 (3.5-14)				3.47 (0.8-4.84)	3.60			
							1.51	1.51	1.51	1.93	3.02	3.02	12.5 (3.5-14)				3.48 (0.8-4.84)	3.59			
							1.54	1.54	1.54	2.63	2.63	2.63	12.5 (3.5-14)				3.49 (0.8-4.84)	3.58			
							1.48	1.48	2.54	2.54	2.54	2.98	12.5 (3.5-14)				3.48 (0.8-4.84)	3.59			
							1.43	1.43	2.47	2.87	2.87	2.87	12.5 (3.5-14)				3.47 (0.8-4.84)	3.60			
							1.75	1.75	2.25	2.25	2.25	2.25	12.5 (3.5-14)				3.53 (0.8-4.84)	3.54			
							1.65	1.65	2.12	2.12	2.12	2.84	12.5 (3.5-14)				3.51 (0.8-4.84)	3.56			
							1.59	1.59	2.05	2.05	2.05	3.17	12.5 (3.5-14)				3.50 (0.8-4.84)	3.57			
							1.48	1.48	1.91	1.91	1.91	3.81	12.5 (3.5-14)				3.48 (0.8-4.84)	3.59			
							1.56	1.56	2.01	2.68	2.68	3.50	12.5 (3.5-14)				3.50 (0.8-4.84)	3.57			
							1.51	1.51	1.94	2.59	3.01	3.01	12.5 (3.5-14)				3.48 (0.8-4.84)	3.59			
							1.41	1.41	1.81	2.42	3.64	3.64	12.5 (3.5-14)				3.46 (0.8-4.84)	3.61			
							1.46	1.46	1.88	2.91	2.91	2.91	12.5 (3.5-14)				3.47 (0.8-4.84)	3.60			
							1.48	1.48	1.92	2.54	2.54	2.54	12.5 (3.5-14)				3.48 (0.8-4.84)	3.59			
							1.43	1.43	1.85	2.46	2.46	2.87	12.5 (3.5-14)				3.47 (0.8-4.84)	3.60			
							1.41	1.41	2.42	2.42	2.42	2.42	12.5 (3.5-14)				3.46 (0.8-4.84)	3.61			
							1.70	2.16	2.16	2.16	2.16	2.16	12.5 (3.5-14)				3.52 (0.8-4.84)	3.55			
							1.59	2.05	2.05	2.05	2.05	2.71	12.5 (3.5-14)				3.50 (0.8-4.84)	3.57			
							1.54	1.97	1.97	1.97	3.08	3.08	12.5 (3.5-14)				3.49 (0.8-4.84)	3.58			
							1.50	1.94	1.94	1.94	2.59	2.59	12.5 (3.5-14)				3.48 (0.8-4.84)	3.59			
							1.46	1.88	1.88	1.88	2.50	2.90	12.5 (3.5-14)				3.47 (0.8-4.84)	3.60			
							1.44	1.84	1.84	2.46	2.46	2.46	12.5 (3.5-14)				3.47 (0.8-4.84)	3.60			
							9	9	9	9	2.08	2.08	2.08				12.5 (3.5-14)	3.51 (0.8-4.84)	3.56		
							9	9	9	9	1.97	1.97	1.97				12.5 (3.5-14)	3.49 (0.8-4.84)	3.58		
							9	9	9	9	1.88	1.88	1.88				12.5 (3.5-14)	3.47 (0.8-4.84)	3.60		

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h / 18:18000Btu/h / 24:24000Btu/h models
•The above is the value for connecting with Wall Mounted type.
•2 or more indoor units should be connected.
•Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).
•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
•The Total ability of connected indoor unit is up to 62000Btu from 34000Btu.

6-unit Multi-split heating

AOYG45LBA6		Combination of Indoor Unit							Heating Operation								Input Power (Min. - Max.)		COP	
									Heating Capacity											
									Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6	Total Capacity (Min. - Max.)					
		kW							kW											
2 Units	12	24	-	-	-	-	-	4.07	8.13	-	-	-	-	-	12.2 (3.5-13.1)	3.41 (0.7-3.54)	3.58			
	14	24	-	-	-	-	-	4.61	7.89	-	-	-	-	-	12.5 (3.5-13.8)	3.56 (0.7-3.76)	3.51			
	18	18	-	-	-	-	-	6.10	6.10	-	-	-	-	-	12.2 (3.5-13.1)	3.41 (0.7-3.54)	3.58			
	18	24	-	-	-	-	-	5.66	7.54	-	-	-	-	-	13.2 (3.5-15.3)	3.78 (0.7-4.20)	3.49			
	24	24	-	-	-	-	-	6.75	6.75	-	-	-	-	-	13.5 (3.5-16.0)	3.89 (0.7-4.41)	3.47			
	7	7	24	-	-	-	-	2.30	2.30	7.90	-	-	-	-	12.5 (3.5-13.8)	3.43 (0.7-3.76)	3.64			
	7	9	18	-	-	-	-	2.35	3.02	6.03	-	-	-	-	11.4 (3.5-12.4)	2.98 (0.7-3.33)	3.83			
	7	9	24	-	-	-	-	2.24	2.88	7.68	-	-	-	-	12.8 (3.5-14.5)	3.50 (0.7-3.98)	3.62			
	7	12	18	-	-	-	-	2.33	3.99	5.98	-	-	-	-	12.3 (3.5-13.5)	3.35 (0.7-3.65)	3.67			
	7	12	24	-	-	-	-	2.17	3.71	7.42	-	-	-	-	13.3 (3.5-15.6)	3.69 (0.7-4.30)	3.60			
	7	14	14	-	-	-	-	2.40	4.80	4.80	-	-	-	-	12.0 (3.5-12.7)	3.15 (0.7-3.44)	3.81			
	7	14	18	-	-	-	-	2.28	4.56	5.86	-	-	-	-	12.7 (3.5-14.2)	3.49 (0.7-3.87)	3.64			
	7	14	24	-	-	-	-	2.10	4.20	7.20	-	-	-	-	13.5 (3.5-16.0)	3.75 (0.7-4.41)	3.60			
	7	18	18	-	-	-	-	2.16	5.57	5.57	-	-	-	-	13.3 (3.5-15.6)	3.69 (0.7-4.30)	3.61			
	7	18	24	-	-	-	-	1.93	4.96	6.61	-	-	-	-	13.5 (3.5-16.0)	3.74 (0.7-4.41)	3.60			
	7	24	24	-	-	-	-	1.72	5.89	5.89	-	-	-	-	13.5 (3.5-16.0)	3.75 (0.7-4.41)	3.63			
	9	9	18	-	-	-	-	3.05	3.05	6.10	-	-	-	-	12.8 (3.5-13.1)	3.28 (0.7-3.54)	3.72			
	9	9	24	-	-	-	-	2.83	2.83	7.54	-	-	-	-	13.2 (3.5-15.3)	3.64 (0.7-4.20)	3.63			
	9	12	14	-	-	-	-	3.09	4.11	4.80	-	-	-	-	12.0 (3.5-12.7)	3.15 (0.7-3.44)	3.81			
	9	12	18	-	-	-	-	2.93	3.91	5.86	-	-	-	-	12.7 (3.5-14.2)	3.49 (0.7-3.87)	3.64			
	9	12	24	-	-	-	-	2.70	3.60	7.20	-	-	-	-	13.5 (3.5-16.0)	3.75 (0.7-4.41)	3.60			
	9	14	14	-	-	-	-	3.00	4.65	4.65	-	-	-	-	12.3 (3.5-13.5)	3.35 (0.7-3.65)	3.67			
	9	14	18	-	-	-	-	2.85	4.44	5.71	-	-	-	-	13.0 (3.5-14.9)	3.59 (0.7-4.09)	3.62			
9	14	24	-	-	-	-	2.59	4.02	6.89	-	-	-	-	13.5 (3.5-16.0)	3.74 (0.7-4.41)	3.61				
9	18	18	-	-	-	-	2.70	5.40	5.40	-	-	-	-	13.5 (3.5-16.0)	3.75 (0.7-4.41)	3.60				
9	18	24	-	-	-	-	2.38	4.76	6.36	-	-	-	-	13.5 (3.5-16.0)	3.73 (0.7-4.41)	3.62				
3-unit connection	9	24	24	-	-	-	-	2.14	5.68	5.68	-	-	-	-	13.5 (3.5-16.0)	3.71 (0.7-4.41)	3.64			
	12	12	12	-	-	-	-	4.07	4.07	4.07	-	-	-	-	12.2 (3.5-13.1)	3.28 (0.7-3.54)	3.72			
	12	12	14	-	-	-	-	3.94	3.95	4.61	-	-	-	-	12.5 (3.5-13.8)	3.43 (0.7-3.76)	3.64			
	12	12	18	-	-	-	-	3.77	3.77	5.66	-	-	-	-	13.2 (3.5-15.3)	3.64 (0.7-4.20)	3.63			
	12	12	24	-	-	-	-	3.38	3.38	6.74	-	-	-	-	13.5 (3.5-16.0)	3.74 (0.7-4.41)	3.61			
	12	14	14	-	-	-	-	3.84	4.48	4.48	-	-	-	-	12.8 (3.5-14.5)	3.54 (0.7-3.98)	3.62			
	12	14	18	-	-	-	-	3.68	4.30	5.52	-	-	-	-	13.5 (3.5-16.0)	3.75 (0.7-4.41)	3.60			
	12	14	24	-	-	-	-	3.24	3.78	6.48	-	-	-	-	13.5 (3.5-16.0)	3.74 (0.7-4.41)	3.61			
	12	18	18	-	-	-	-	3.38	5.06	5.06	-	-	-	-	13.5 (3.5-16.0)	3.74 (0.7-4.41)	3.61			
	12	18	24	-	-	-	-	3.00	4.50	6.00	-	-	-	-	13.5 (3.5-16.0)	3.72 (0.7-4.41)	3.63			
	12	24	24	-	-	-	-	2.70	5.40	5.40	-	-	-	-	13.5 (3.5-16.0)	3.71 (0.7-4.41)	3.64			
	14	14	14	-	-	-	-	4.40	4.40	4.40	-	-	-	-	13.2 (3.5-15.3)	3.64 (0.7-4.20)	3.63			
	14	14	18	-	-	-	-	4.11	4.11	5.28	-	-	-	-	13.5 (3.5-16.0)	3.75 (0.7-4.41)	3.60			
	14	14	24	-	-	-	-	3.63	3.63	6.24	-	-	-	-	13.5 (3.5-16.0)	3.73 (0.7-4.41)	3.62			
	14	18	18	-	-	-	-	3.78	4.86	4.86	-	-	-	-	13.5 (3.5-16.0)	3.74 (0.7-4.41)	3.61			
	14	18	24	-	-	-	-	3.38	4.34	5.78	-	-	-	-	13.5 (3.5-16.0)	3.72 (0.7-4.41)	3.63			
	14	24	24	-	-	-	-	3.04	5.23	5.23	-	-	-	-	13.5 (3.5-16.0)	3.70 (0.7-4.41)	3.65			
	18	18	18	-	-	-	-	4.50	4.50	4.50	-	-	-	-	13.5 (3.5-16.0)	3.72 (0.7-4.41)	3.63			
	18	18	24	-	-	-	-	4.05	4.05	5.40	-	-	-	-	13.5 (3.5-16.0)	3.71 (0.7-4.41)	3.64			
	7	7	7	14	-	-	-	2.40	2.40	2.40	4.80	-	-	-	12.0 (3.5-12.7)	2.98 (0.7-3.44)	4.03			
	7	7	7	18	-	-	-	2.28	2.28	2.28	5.86	-	-	-	12.7 (3.5-14.2)	3.35 (0.7-3.87)	3.79			
	7	7	9	24	-	-	-	2.10	2.10	2.10	7.20	-	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74			
	7	7	9	12	-	-	-	2.40	2.40	3.09	4.11	-	-	-	12.0 (3.5-12.7)	2.98 (0.7-3.44)	4.03			
	7	7	9	14	-	-	-	2.33	2.33	2.99	4.65	-	-	-	12.3 (3.5-13.5)	3.19 (0.7-3.65)	3.86			
	7	7	9	18	-	-	-	2.22	2.22	2.85	5.71	-	-	-	13.0 (3.5-14.9)	3.46 (0.7-4.09)	3.76			
	7	7	9	24	-	-	-	2.01	2.01	2.59	6.89	-	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75			
	7	7	12	12	-	-	-	2.30	2.30	3.95	3.95	-	-	-	12.5 (3.5-13.8)	3.28 (0.7-3.76)	3.81			
	7	7	12	14	-	-	-	2.24	2.24	3.84	4.48	-	-	-	12.8 (3.5-14.5)	3.41 (0.7-3.98)	3.75			
	7	7	12	18	-	-	-	2.15	2.15	3.68	5.52	-	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74			
	7	7	12	24	-	-	-	1.89	1.89	3.24	6.48	-	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75			
	7	7	14	14	-	-	-	2.20	2.20	4.40	4.40	-	-	-	13.2 (3.5-15.3)	3.52 (0.7-4.20)	3.75			
	7	7	14	18	-	-	-	2.05	2.05	4.11	5.29	-	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74			
	7	7	14	24	-	-	-	1.82	1.82	3.63	6.23	-	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76			
	7	7	18	18	-	-	-	1.89	1.89	4.86	4.86	-	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75			
	7	7	18	24	-	-	-	1.69	1.69	4.34	5.78	-	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77			
	7	7	24	24	-	-	-	1.52	1.52	5.23	5.23	-	-	-	13.5 (3.5-16.0)	3.56 (0.7-4.41)	3.79			
	7	9	9	9	-	-	-	2.34	3.02	3.02	3.02	-	-	-	11.4 (3.5-12.4)	2.82 (0.7-3.33)	4.04			
	7	9	9	12	-	-	-	2.33	2.99	2.99	3.95	-	-	-	12.3 (3.5-13.5)	3.19 (0.7-3.65)	3.86			
	7	9	9	14	-	-	-	2.28	2.93	2.93	4.56	-	-	-	12.7 (3.5-14.2)	3.35 (0.7-3.87)	3.79			
	7	9	9	18	-	-	-	2.17	2.78	2.78	5.57	-	-	-	13.3 (3.5-15.6)	3.56 (0.7-4.30)	3.74			
	7	9	9	24	-	-	-	1.93	2.48	2.48	6.61	-	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75			
	7	9	12	12	-	-	-	2.24	2.88	3.84	3.84	-	-	-	12.8 (3.5-14.5)	3.41 (0.7-3.98)	3.75			
	7	9	12	14	-	-	-	2.20	2.83	3.77	4.40	-	-	-	13.2 (3.5-15.3)	3.52 (0.7-4.20)	3.75			
	7	9	12	18	-	-	-	2.05	2.64	3.52	5.29	-	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74			
	7	9	12	24	-	-	-	1.82	2.34	3.12	6.22	-	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76			
	7	9	14	14	-	-	-	2.15	2.75	4.30	4.30	-	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74			
	7	9	14	18	-	-	-	1.91	2.53	3.94	5.06	-	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75			
	7	9	14	24	-	-	-	1.75	2.25	3.50	6.00	-	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77			
	7	9	18	18	-	-	-	1.82	2.34	4.67	4.67	-	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76			
	7	9	18	24	-	-	-	1.63	2.09	4.19	5.59	-	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78			
	7	12	12	12	-	-	-	2.17	3.71	3.71	3.71	-	-	-	13.3 (3.5-15.6)	3.56 (0.7-4.30)	3.74			
	7	12	12	14	-	-	-	2.10	3.60	3.60	4.20	-	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74			
	7	12	12	18	-	-	-	1.93	3.31	3.31	4.95	-	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75			
	7	12	12	24	-	-	-	1.72	2.95	2.95	5.88	-	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77			
	7	12	14	14	-	-	-	2.05	3.45	4.02	4.02	-	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75			
	7	12	14	18	-	-	-	1.85	3.18	3.71	4.76	-	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76			
	7	12	14	24	-	-	-	1.66	2.84	3.32	5.68	-	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78			
7	12	18	18	-	-	-	1.72	2.94	4.42	4.42	-	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77				
7	12	18	24	-	-	-	1.55	2.66	3.98	5.31	-	-	-	13.5 (3.5-16.0)	3.56 (0.7-4.41)	3.79				
7	14	14	14	-	-	-	1.92	3.86	3.86	3.86	-	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75				
7	14	14	18	-	-	-	1.78	3.57	3.57	4.58	-	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.78				
7	14	14	24	-	-	-	1.60	3.20	3.20	5.50	-	-	-	13.5 (3.5-16.0)	3.57 (0.7-					

6-unit Multi-split Combination Table-Heating

6-unit Multi-split heating

AOYG45LBLA6	Combination of Indoor Unit					Heating Operation							Input Power (Min. - Max.)	COP
						Heating Capacity						Total Capacity (Min. - Max.)		
						Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6			
4-unit connection						kW	kW	LW	kW	kW	kW	kW	kW	kW
	12	12	12	-	-	3.38	3.38	3.38	3.38	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.4)	3.75
	12	12	14	-	-	3.24	3.24	3.24	3.78	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.4)	3.75
	12	12	12	18	-	3.00	3.00	3.00	4.50	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.4)	3.77
	12	12	12	24	-	2.70	2.70	2.70	5.40	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.4)	3.78
	12	12	14	14	-	3.12	3.12	3.63	3.63	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.4)	3.76
	12	12	14	18	-	2.89	2.89	3.38	4.34	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.4)	3.77
	12	12	14	24	-	2.61	2.61	3.05	5.23	-	-	13.5 (3.5-16.0)	3.56 (0.7-4.4)	3.79
	12	12	18	18	-	2.70	2.70	4.05	4.05	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.4)	3.78
	12	14	14	14	-	3.00	3.50	3.50	3.50	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.4)	3.77
	12	14	14	18	-	2.79	3.26	3.26	4.19	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.4)	3.78
	12	14	18	18	-	2.61	3.05	3.92	3.92	-	-	13.5 (3.5-16.0)	3.56 (0.7-4.4)	3.79
	7	7	7	7	7	2.40	2.40	2.40	2.40	2.40	-	12.0 (3.5-12.7)	2.82 (0.7-3.44)	4.26
	7	7	7	7	9	2.33	2.33	2.33	2.33	2.98	-	12.3 (3.5-13.5)	3.03 (0.7-3.65)	3.87
	7	7	7	7	12	2.24	2.24	2.24	2.24	3.84	-	12.8 (3.5-14.5)	3.29 (0.7-3.98)	3.89
	7	7	7	7	14	2.20	2.20	2.20	2.20	4.40	-	13.2 (3.5-15.3)	3.40 (0.7-4.20)	3.88
	7	7	7	7	18	2.05	2.05	2.05	2.05	5.30	-	13.5 (3.5-16.0)	3.49 (0.7-4.4)	3.87
	7	7	7	7	24	1.82	1.82	1.82	1.82	6.22	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89
	7	7	7	9	9	2.28	2.28	2.28	2.93	2.93	-	12.7 (3.5-14.2)	3.23 (0.7-3.87)	3.93
	7	7	7	9	12	2.20	2.20	2.20	2.83	3.77	-	13.2 (3.5-15.3)	3.40 (0.7-4.20)	3.88
	7	7	7	9	14	2.15	2.15	2.15	2.76	4.29	-	13.5 (3.5-16.0)	3.49 (0.7-4.4)	3.87
	7	7	7	9	18	1.97	1.97	1.97	2.53	5.06	-	13.5 (3.5-16.0)	3.48 (0.7-4.4)	3.88
	7	7	9	24	-	1.75	1.75	2.25	6.00	-	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90
	7	7	9	12	-	2.10	2.10	2.10	3.60	3.60	-	13.5 (3.5-16.0)	3.49 (0.7-4.4)	3.87
7	7	7	12	14	2.01	2.01	2.01	3.45	4.02	-	13.5 (3.5-16.0)	3.48 (0.7-4.4)	3.88	
7	7	7	12	18	1.85	1.85	1.85	3.18	4.77	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89	
7	7	7	12	24	1.66	1.66	1.66	2.84	5.68	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	7	7	14	14	1.93	1.93	1.93	3.86	3.86	-	13.5 (3.5-16.0)	3.48 (0.7-4.4)	3.88	
7	7	7	14	18	1.78	1.78	1.78	3.57	4.59	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89	
7	7	7	14	24	1.60	1.60	1.60	3.20	5.50	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	7	7	18	18	1.66	1.66	1.66	4.26	4.26	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	7	9	9	9	2.22	2.22	2.85	2.85	2.85	-	13.0 (3.5-14.9)	3.34 (0.7-4.09)	3.87	
7	7	9	9	12	2.15	2.15	2.76	2.76	3.44	-	13.5 (3.5-16.0)	3.49 (0.7-4.4)	3.89	
7	7	9	9	14	2.05	2.05	2.64	2.64	4.12	-	13.5 (3.5-16.0)	3.49 (0.7-4.4)	3.87	
7	7	9	9	18	1.89	1.89	2.43	2.43	4.86	-	13.5 (3.5-16.0)	3.48 (0.7-4.4)	3.88	
7	7	9	9	24	1.69	1.69	2.17	2.17	5.78	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90	
7	7	9	12	12	2.01	2.01	2.58	3.45	3.45	-	13.5 (3.5-16.0)	3.48 (0.7-4.4)	3.88	
7	7	9	12	14	1.93	1.93	2.48	3.31	3.85	-	13.5 (3.5-16.0)	3.48 (0.7-4.4)	3.88	
7	7	9	12	18	1.78	1.78	2.29	3.06	4.59	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89	
7	7	9	12	24	1.60	1.60	2.06	2.75	5.49	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	7	9	14	14	1.85	1.85	2.38	3.71	3.71	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89	
7	7	9	14	18	1.72	1.72	2.21	3.44	4.41	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90	
7	7	9	14	24	1.55	1.55	1.99	3.10	5.31	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92	
7	7	9	18	18	1.60	1.60	2.06	4.12	4.12	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	7	12	12	12	1.89	1.89	3.24	3.24	3.24	-	13.5 (3.5-16.0)	3.48 (0.7-4.4)	3.88	
7	7	12	12	14	1.82	1.82	3.12	3.12	3.62	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89	
7	7	12	12	18	1.69	1.69	2.89	2.89	4.34	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90	
7	7	12	12	24	1.52	1.52	2.61	2.61	5.24	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92	
7	7	12	14	14	1.75	1.75	3.00	3.50	3.50	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90	
7	7	12	14	18	1.63	1.63	2.79	3.26	4.19	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	7	12	18	18	1.52	1.52	2.62	3.92	3.92	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92	
7	7	14	14	14	1.68	1.68	3.38	3.38	3.38	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90	
7	7	14	14	18	1.58	1.58	3.15	3.15	4.04	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	9	9	9	9	2.18	2.18	2.78	2.78	2.78	-	13.3 (3.5-15.6)	3.44 (0.7-4.30)	3.87	
7	9	9	9	12	2.05	2.64	2.64	2.64	3.53	-	13.5 (3.5-16.0)	3.49 (0.7-4.4)	3.87	
7	9	9	9	14	1.97	2.53	2.53	2.53	3.94	-	13.5 (3.5-16.0)	3.48 (0.7-4.4)	3.88	
7	9	9	9	18	1.82	2.34	2.34	2.34	4.66	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89	
7	9	9	9	24	1.63	2.09	2.09	2.09	5.60	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	9	9	12	12	1.92	2.48	2.48	3.31	3.31	-	13.5 (3.5-16.0)	3.48 (0.7-4.4)	3.88	
7	9	9	12	14	1.85	2.38	2.38	3.18	3.71	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89	
7	9	9	12	18	1.72	2.21	2.21	2.95	4.41	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90	
7	9	9	12	24	1.55	1.99	1.99	2.66	5.31	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92	
7	9	9	14	14	1.78	2.29	2.29	3.57	3.57	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89	
7	9	9	14	18	1.66	2.13	2.13	3.32	4.26	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	9	9	18	18	1.56	1.99	1.99	3.98	3.98	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92	
7	9	12	12	12	1.82	2.32	3.12	3.12	3.12	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89	
7	9	12	12	14	1.75	2.25	3.00	3.00	3.50	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90	
7	9	12	12	18	1.63	2.09	2.79	2.79	4.20	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	9	12	14	14	1.69	2.17	2.88	3.38	3.38	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90	
7	9	12	14	18	1.58	2.03	2.70	3.15	4.04	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	9	14	14	14	1.63	2.09	3.26	3.26	3.26	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	9	14	14	18	1.52	1.96	3.05	3.05	3.92	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92	
7	12	12	12	12	1.70	2.95	2.95	2.95	2.95	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90	
7	12	12	12	14	1.66	2.84	2.84	2.84	3.32	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	12	12	12	18	1.55	2.66	2.66	2.66	3.97	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92	
7	12	12	14	14	1.60	2.75	2.75	3.20	3.20	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
7	12	14	14	14	1.55	2.65	3.10	3.10	3.10	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92	
9	9	9	9	9	2.70	2.70	2.70	2.70	2.70	-	13.5 (3.5-16.0)	3.49 (0.7-4.4)	3.87	
9	9	9	9	12	2.53	2.53	2.53	2.53	3.38	-	13.5 (3.5-16.0)	3.48 (0.7-4.4)	3.88	
9	9	9	9	14	2.43	2.43	2.43	2.43	3.78	-	13.5 (3.5-16.0)	3.48 (0.7-4.4)	3.88	
9	9	9	9	18	2.25	2.25	2.25	2.25	4.50	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90	
9	9	9	9	24	2.03	2.03	2.03	2.03	5.38	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
9	9	9	12	12	2.38	2.38	2.38	3.18	3.18	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89	
9	9	9	12	14	2.29	2.29	2.29	3.06	3.57	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89	
9	9	9	12	18	2.13	2.13	2.13	2.84	4.27	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
9	9	9	14	14	2.21	2.21	2.21	3.44	3.44	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90	
9	9	9	14	18	2.06	2.06	2.06	3.20	4.12	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
9	9	12	12	12	2.25	2.25	3.00	3.00	3.00	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90	
9	9	12	12	14	2.17	2.17	2.89	2.89	3.38	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90	
9	9	12	12	18	2.03	2.03	2.70	2.70	4.04	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
9	9	12	14	14	2.09	2.09	2.80	3.26	3.26	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
9	9	12	14	18	1.96	1.96	2.61	3.05	3.92	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92	
9	9	14	14	14	2.03	2.03	3.15	3.15	3.15	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
9	12	12	12	12	2.14	2.84	2.84	2.84	2.84	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91	
9	12	12	12	14	2.06	2.75	2.75	2.75	3.19	-				

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h / 18:18000Btu/h / 24:24000Btu/h models
•The above is the value for connecting with Wall Mounted type.
•2 or more indoor units should be connected.
•Heating capacity is based on 20°CDB (indoor temperature), 7°CDB/6°CWB (outdoor temperature).
•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
•The Total ability of connected indoor unit is up to 54000Btu from 27000Btu.

6-unit Multi-split heating

AOYG45LBLA6	Combination of Indoor Unit		Heating Operation								Input Power (Min. - Max.)	COP	
			Heating Capacity										
			Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6	Total Capacity (Min. - Max.)				
			kW	kW	kW	kW	kW	kW	kW				
6-unit connection	7	7	7	7	7	7	2.20	2.20	2.20	2.20	13.2 (3.5-15.3)	3.28 (0.7-4.20)	4.02
	7	7	7	7	7	9	2.15	2.15	2.15	2.15	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	7	12	2.01	2.01	2.01	2.01	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	7	14	1.93	1.93	1.93	1.93	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	7	18	1.78	1.78	1.78	1.78	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	7	24	1.60	1.60	1.60	1.60	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	9	9	2.05	2.05	2.05	2.65	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	9	12	1.93	1.93	1.93	2.48	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	9	14	1.85	1.85	2.38	3.12	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	9	18	1.72	1.72	1.72	2.21	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	9	24	1.55	1.55	1.55	1.99	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	12	12	1.82	1.82	1.82	3.11	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	12	14	1.75	1.75	1.75	3.00	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	12	18	1.63	1.63	1.63	2.79	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	14	14	1.69	1.69	1.69	3.37	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	7	14	18	1.58	1.58	1.58	3.15	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	9	9	9	1.97	1.97	2.53	2.53	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	9	9	12	1.85	1.85	2.38	3.19	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	9	9	14	1.78	1.78	2.29	2.29	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	9	9	18	1.66	1.66	2.13	2.13	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	9	12	12	1.75	1.75	2.25	3.00	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	9	12	14	1.69	1.69	2.17	2.89	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	9	12	18	1.58	1.58	2.03	2.70	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	9	14	14	1.63	1.63	2.09	3.26	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	12	12	12	1.66	1.66	2.84	2.84	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	12	12	14	1.60	1.60	2.75	3.20	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	7	12	14	14	1.55	1.55	2.65	3.10	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	9	9	9	9	1.89	1.89	2.43	2.43	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	9	9	9	12	1.78	1.78	2.29	2.29	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	9	9	9	14	1.72	1.72	2.21	2.21	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	9	9	9	18	1.60	1.60	2.06	2.06	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
	7	7	9	9	12	12	1.69	1.69	2.17	2.89	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00
7	7	9	9	12	14	1.63	1.63	2.09	2.79	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
7	7	9	9	12	18	1.52	1.52	1.96	2.61	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
7	7	9	9	14	14	1.58	1.58	2.03	3.14	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
7	7	9	12	12	12	1.60	1.60	2.05	2.75	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
7	7	9	12	12	14	1.55	1.55	1.99	2.66	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
7	7	12	12	12	12	1.53	1.53	2.61	2.61	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
7	9	9	9	9	9	1.80	2.34	2.34	2.34	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
7	9	9	9	9	12	1.72	2.21	2.21	2.21	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
7	9	9	9	9	14	1.66	2.13	2.13	2.13	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
7	9	9	9	12	12	1.65	2.09	2.09	2.79	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
7	9	9	9	12	14	1.58	2.03	2.03	2.69	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
7	9	9	12	12	12	1.54	1.99	1.99	2.66	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
9	9	9	9	9	9	2.25	2.25	2.25	2.25	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
9	9	9	9	9	12	2.13	2.13	2.13	2.13	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	
9	9	9	9	9	12	2.03	2.03	2.03	2.69	13.5 (3.5-16.0)	3.37 (0.7-4.41)	4.00	

8-unit Multi-split Combination Table-Cooling

8-unit Multi-split cooling

AOYG45LB18	Combination of Indoor Unit								Cooling Operation										Input power
																	Total		
									Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6	Unit 7	Unit 8	kW	kW	
2-unit connection	24	24	-	-	-	-	-	-	7.03	7.03	-	-	-	-	-	-	-	14.06	5.20
	18	24	-	-	-	-	-	-	5.27	7.03	-	-	-	-	-	-	-	12.30	4.24
	18	18	24	-	-	-	-	-	4.63	4.63	6.18	-	-	-	-	-	-	15.45	5.89
	18	18	18	-	-	-	-	-	5.01	5.01	5.01	-	-	-	-	-	-	15.03	5.90
	14	24	24	-	-	-	-	-	3.54	6.07	6.07	-	-	-	-	-	-	15.68	5.87
	14	18	24	-	-	-	-	-	3.84	4.94	6.59	-	-	-	-	-	-	15.37	5.90
	14	18	18	-	-	-	-	-	4.10	5.27	5.27	-	-	-	-	-	-	14.64	5.50
	14	14	24	-	-	-	-	-	4.10	4.10	7.03	-	-	-	-	-	-	15.23	5.79
	14	14	18	-	-	-	-	-	4.10	4.10	5.27	-	-	-	-	-	-	13.47	4.89
	14**	14**	14**	-	-	-	-	-	4.10	4.10	4.10	-	-	-	-	-	-	12.30	4.24
	12	24	24	-	-	-	-	-	3.09	6.18	6.18	-	-	-	-	-	-	15.45	5.89
	12	18	24	-	-	-	-	-	3.35	5.01	6.68	-	-	-	-	-	-	15.04	5.90
	12	18	18	-	-	-	-	-	3.52	5.27	5.27	-	-	-	-	-	-	14.06	5.20
	12	14	24	-	-	-	-	-	3.52	4.10	7.03	-	-	-	-	-	-	14.65	5.50
	12	14	18	-	-	-	-	-	3.52	4.10	5.27	-	-	-	-	-	-	12.89	4.57
3-unit connection	12**	14**	14**	-	-	-	-	-	3.52	4.10	4.10	-	-	-	-	-	-	11.72	3.91
	12	12	24	-	-	-	-	-	3.52	3.52	7.03	-	-	-	-	-	-	14.07	5.20
	12	12	18	-	-	-	-	-	3.52	3.52	5.27	-	-	-	-	-	-	12.31	4.24
	9	24	24	-	-	-	-	-	2.46	6.54	6.54	-	-	-	-	-	-	15.54	5.90
	9	18	24	-	-	-	-	-	2.64	5.27	7.03	-	-	-	-	-	-	14.94	5.65
	9	18	18	-	-	-	-	-	2.64	5.27	5.27	-	-	-	-	-	-	13.18	4.73
	9	14	24	-	-	-	-	-	2.64	4.10	7.03	-	-	-	-	-	-	13.77	5.05
	9	14	18	-	-	-	-	-	2.64	4.10	5.27	-	-	-	-	-	-	12.01	4.08
	9	12	24	-	-	-	-	-	2.64	3.52	7.03	-	-	-	-	-	-	13.19	4.73
	9	12	18	-	-	-	-	-	2.64	3.52	5.27	-	-	-	-	-	-	11.43	3.74
	9	9	24	-	-	-	-	-	2.64	2.64	7.03	-	-	-	-	-	-	12.31	4.24
	7	24	24	-	-	-	-	-	1.93	6.64	6.64	-	-	-	-	-	-	15.21	5.90
	7	18	24	-	-	-	-	-	2.05	5.27	7.03	-	-	-	-	-	-	14.35	5.35
	7	18	18	-	-	-	-	-	2.05	5.27	5.27	-	-	-	-	-	-	12.59	4.41
	7	14	24	-	-	-	-	-	2.05	4.10	7.03	-	-	-	-	-	-	13.18	4.73
7	14	18	-	-	-	-	-	2.05	4.10	5.27	-	-	-	-	-	-	11.42	3.74	
4-unit connection	7	12	24	-	-	-	-	-	2.05	3.52	7.03	-	-	-	-	-	-	12.60	4.41
	7	9	24	-	-	-	-	-	2.05	2.64	7.03	-	-	-	-	-	-	11.72	3.91
	14	14	14	18	-	-	-	-	3.60	3.60	3.60	4.63	-	-	-	-	-	15.45	5.89
	14	14	14	14	-	-	-	-	3.84	3.84	3.84	3.84	-	-	-	-	-	15.37	5.90
	12	14	18	18	-	-	-	-	3.04	3.54	4.55	4.55	-	-	-	-	-	15.68	5.87
	12	14	14	18	-	-	-	-	3.15	3.67	3.67	4.72	-	-	-	-	-	15.21	5.90
	12	14	14	14	-	-	-	-	3.35	3.90	3.90	3.90	-	-	-	-	-	15.04	5.90
	12	12	18	18	-	-	-	-	3.09	3.09	4.63	4.63	-	-	-	-	-	15.45	5.89
	12	12	14	24	-	-	-	-	3.04	3.04	3.54	6.07	-	-	-	-	-	15.69	5.87
	12	12	14	18	-	-	-	-	3.30	3.30	3.84	4.94	-	-	-	-	-	15.38	5.90
	12	12	14	14	-	-	-	-	3.52	3.52	4.10	4.10	-	-	-	-	-	15.24	5.79
	12	12	12	24	-	-	-	-	3.09	3.09	3.09	6.18	-	-	-	-	-	15.45	5.89
	12	12	12	18	-	-	-	-	3.35	3.35	3.35	5.01	-	-	-	-	-	15.05	5.90
	12	12	12	14	-	-	-	-	3.52	3.52	3.52	4.10	-	-	-	-	-	14.66	5.50
	12	12	12	12	-	-	-	-	3.52	3.52	3.52	3.52	-	-	-	-	-	14.08	5.20
	9	14	18	18	-	-	-	-	2.34	3.64	4.67	4.67	-	-	-	-	-	15.33	5.89
	9	14	14	24	-	-	-	-	2.30	3.57	3.57	6.12	-	-	-	-	-	15.57	5.88
	9	14	14	18	-	-	-	-	2.49	3.87	3.87	4.97	-	-	-	-	-	15.21	5.90
	9	14	14	14	-	-	-	-	2.64	4.10	4.10	4.10	-	-	-	-	-	14.94	5.65
	9	12	18	18	-	-	-	-	2.46	3.28	4.90	4.90	-	-	-	-	-	15.54	5.90
	9	12	14	24	-	-	-	-	2.34	3.12	3.64	6.23	-	-	-	-	-	15.33	5.89
	9	12	14	18	-	-	-	-	2.53	3.37	3.93	5.05	-	-	-	-	-	14.87	5.90
	9	12	14	14	-	-	-	-	2.64	3.52	4.10	4.10	-	-	-	-	-	14.36	5.35
	9	12	12	24	-	-	-	-	2.46	3.28	3.28	6.54	-	-	-	-	-	15.55	5.90
	9	12	12	18	-	-	-	-	2.64	3.52	3.52	5.27	-	-	-	-	-	14.95	5.65
	9	12	12	14	-	-	-	-	2.64	3.52	3.52	4.10	-	-	-	-	-	13.78	5.05
	9	12	12	12	-	-	-	-	2.64	3.52	3.52	3.52	-	-	-	-	-	13.20	4.73
	9	9	18	24	-	-	-	-	2.32	2.32	4.63	6.18	-	-	-	-	-	15.45	5.89
	9	9	18	18	-	-	-	-	2.51	2.51	5.01	5.01	-	-	-	-	-	15.04	5.90
	9	9	14	24	-	-	-	-	2.47	2.47	3.84	6.59	-	-	-	-	-	15.38	5.90
	9	9	14	18	-	-	-	-	2.64	2.64	4.10	5.27	-	-	-	-	-	14.65	5.50
	9	9	14	14	-	-	-	-	2.64	2.64	4.10	4.10	-	-	-	-	-	13.48	4.89
	9	9	12	24	-	-	-	-	2.51	2.51	3.35	6.68	-	-	-	-	-	15.05	5.90
	9	9	12	18	-	-	-	-	2.64	2.64	3.52	5.27	-	-	-	-	-	14.07	5.20
	9	9	12	14	-	-	-	-	2.64	2.64	3.52	4.10	-	-	-	-	-	12.90	4.57
	9	9	12	12	-	-	-	-	2.64	2.64	3.52	3.52	-	-	-	-	-	12.32	4.24
	9	9	9	24	-	-	-	-	2.64	2.64	2.64	7.03	-	-	-	-	-	14.95	5.65
	9	9	9	18	-	-	-	-	2.64	2.64	2.64	5.27	-	-	-	-	-	13.19	4.73
	9	9	9	14	-	-	-	-	2.64	2.64	2.64	4.10	-	-	-	-	-	12.02	4.08
	9	9	9	12	-	-	-	-	2.64	2.64	2.64	3.52	-	-	-	-	-	11.44	3.74
	7	18	18	18	-	-	-	-	1.79	4.59	4.59	4.59	-	-	-	-	-	15.56	5.88
	7	14	18	18	-	-	-	-	1.91	3.82	4.91	4.91	-	-	-	-	-	15.54	5.90
	7	14	14	24	-	-	-	-	1.82	3.64	3.64	6.24	-	-	-	-	-	15.33	5.89
	7	14	14	18	-	-	-	-	1.96	3.93	3.93	5.05	-	-	-	-	-	14.87	5.90
	7	14	14	14	-	-	-	-	2.05	4.10	4.10	4.10	-	-	-	-	-	14.35	5.35
	7	12	18	24	-	-	-	-	1.79	3.07	4.59	6.12	-	-	-	-	-	15.57	5.88
7	12	18	18	-	-	-	-	1.93	3.32	4.97	4.97	-	-	-	-	-	15.21	5.90	
7	12	14	24	-	-	-	-	1.91	3.28	3.82	6.54	-	-	-	-	-	15.54	5.90	
7	12	14	18	-	-	-	-	2.05	3.52	4.10	5.27	-	-	-	-	-	14.94	5.65	
7	12	14	14	-	-	-	-	2.05	3.52	4.10	4.10	-	-	-	-	-	13.77	5.05	
7	12	12	24	-	-	-	-	1.93	3.32	3.32	6.63	-	-	-	-	-	15.21	5.90	
7	12	12	18	-	-	-	-	2.05	3.52	3.52	5.27	-	-	-	-	-	14.36	5.35	
7	12	12	14	-	-	-	-	2.05	3.52	3.52	4.10	-	-	-	-	-	13.19	4.73	
7	12	12	12	-	-	-	-	2.05	3.52	3.52	3.52	-	-	-	-	-	12.61	4.41	
7	9	18	24	-	-	-	-	1.84	2.36	4.72	6.29	-	-	-	-	-	15.21	5.90	
7	9	18	18	-	-	-	-	2.05	2.64	5.27	5.27	-	-	-	-	-	15.23	5.79	
7	9	14	24	-	-	-	-	1.95	2.51	3.90	6.68	-	-	-	-	-	15.04	5.90	
7	9	14	18	-	-	-	-	2.05	2.64	4.10	7.07	-	-	-	-	-	14.06	5.20	
7	9	12	24	-	-	-	-	2.05	2.64	3.52	7.03	-	-	-	-	-	15.24	5.79	
7	9	12	18	-	-	-	-	2.05	2.64	3.52	5.27	-	-	-	-	-	13.48	4.89	
7	9	12	14	-	-	-	-	2.05											

8-unit Multi-split Combination Table-Cooling/Heating

8-unit Multi-split cooling

AOYG45LBT8	Combination of Indoor Unit								Cooling Operation									Input power	
									Cooling Capacity										
									Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6	Unit 7	Unit 8	Total		
6-unit connection	7	9	9	9	9	18	-	-	1.79	2.30	2.30	2.30	2.30	4.59	-	-	15.57	5.88	
	7	9	9	9	9	12	-	-	1.93	2.49	2.49	2.49	2.49	3.32	-	-	15.22	5.90	
	7	9	9	9	9	9	-	-	2.05	2.64	2.64	2.64	2.64	2.64	-	-	15.25	5.79	
	7	7	12	12	12	12	-	-	1.77	1.77	3.04	3.04	3.04	3.04	-	-	15.69	5.87	
	7	7	9	12	12	14	-	-	1.79	1.79	2.30	3.07	3.07	3.57	-	-	15.57	5.88	
	7	7	9	12	12	12	-	-	1.82	1.82	2.34	3.12	3.12	3.12	-	-	15.34	5.89	
	7	7	9	9	14	14	-	-	1.80	1.80	2.32	2.32	3.60	3.60	-	-	15.45	5.89	
	7	7	9	12	12	18	-	-	1.77	1.77	2.28	2.28	3.04	4.55	-	-	15.69	5.87	
	7	7	9	9	12	14	-	-	1.83	1.83	2.36	2.36	3.15	3.67	-	-	15.21	5.90	
	7	7	9	9	12	12	-	-	1.92	1.92	2.47	2.47	3.30	3.30	-	-	15.38	5.90	
	7	7	9	9	9	18	-	-	1.82	1.82	2.34	2.34	2.34	4.67	-	-	15.33	5.89	
	7	7	9	9	9	14	-	-	1.93	1.93	2.49	2.49	2.49	3.87	-	-	15.21	5.90	
	7	7	9	9	9	12	-	-	1.96	1.96	2.53	2.53	2.53	3.37	-	-	14.88	5.90	
	7	7	9	9	9	9	-	-	2.05	2.05	2.64	2.64	2.64	2.64	-	-	14.66	5.50	
	7	7	7	12	14	14	-	-	1.79	1.79	1.79	3.07	3.57	3.57	-	-	15.57	5.88	
	7	7	7	12	12	14	-	-	1.82	1.82	1.82	3.12	3.12	3.64	-	-	15.33	5.89	
	7	7	7	12	12	12	-	-	1.91	1.91	1.91	3.28	3.28	3.28	-	-	15.55	5.90	
	7	7	7	9	14	18	-	-	1.77	1.77	1.77	2.28	3.54	4.55	-	-	15.68	5.87	
	7	7	7	9	14	14	-	-	1.84	1.84	1.84	2.36	3.67	3.67	-	-	15.21	5.90	
	7	7	7	9	12	18	-	-	1.80	1.80	1.80	2.32	3.09	4.63	-	-	15.45	5.89	
	7	7	7	9	12	14	-	-	1.92	1.92	1.92	2.47	3.30	3.84	-	-	15.38	5.90	
	7	7	7	9	12	12	-	-	1.95	1.95	1.95	2.51	3.35	3.35	-	-	15.05	5.90	
	7	7	7	9	9	18	-	-	1.91	1.91	1.91	2.46	2.46	4.90	-	-	15.54	5.90	
	7	7	7	9	9	14	-	-	1.96	1.96	1.96	2.53	2.53	3.93	-	-	14.87	5.90	
	7	7	7	9	9	12	-	-	2.05	2.05	2.05	2.64	2.64	3.52	-	-	14.95	5.65	
	7	7	7	9	9	9	-	-	2.05	2.05	2.05	2.64	2.64	2.64	-	-	14.07	5.20	
	7	7	7	7	14	18	-	-	1.80	1.80	1.80	1.80	3.60	4.63	-	-	15.45	5.89	
	7	7	7	7	14	14	-	-	1.92	1.92	1.92	1.92	3.84	3.84	-	-	15.37	5.90	
	7	7	7	7	12	18	-	-	1.84	1.84	1.84	1.84	3.15	4.72	-	-	15.21	5.90	
	7	7	7	7	12	14	-	-	1.95	1.95	1.95	1.95	3.35	3.90	-	-	15.04	5.90	
	7	7	7	7	12	12	-	-	2.05	2.05	2.05	2.05	3.52	3.52	-	-	15.24	5.79	
	7	7	7	7	9	24	-	-	1.79	1.79	1.79	2.30	6.12	-	-	-	15.57	5.88	
	7	7	7	7	9	18	-	-	1.93	1.93	1.93	1.93	2.49	4.97	-	-	15.21	5.90	
	7	7	7	7	9	14	-	-	2.05	2.05	2.05	2.05	2.64	4.10	-	-	14.94	5.65	
	7	7	7	7	9	12	-	-	2.05	2.05	2.05	2.05	2.64	3.52	-	-	14.36	5.35	
	7	7	7	7	9	9	-	-	2.05	2.05	2.05	2.05	2.64	2.64	-	-	13.48	4.89	
	7	7	7	7	7	24	-	-	1.82	1.82	1.82	1.82	1.82	6.24	-	-	15.33	5.89	
	7	7	7	7	7	18	-	-	1.96	1.96	1.96	1.96	1.96	5.05	-	-	14.87	5.90	
	7	7	7	7	7	14	-	-	2.05	2.05	2.05	2.05	2.05	4.10	-	-	14.35	5.35	
	7	7	7	7	7	12	-	-	2.05	2.05	2.05	2.05	2.05	3.52	-	-	13.77	5.05	
	7	7	7	7	7	9	-	-	2.05	2.05	2.05	2.05	2.05	2.64	-	-	12.89	4.57	
	7	7	7	7	7	7	-	-	2.05	2.05	2.05	2.05	2.05	2.05	-	-	12.30	4.24	
	7-unit connection	7	9	9	9	9	9	-	-	1.78	2.30	2.30	2.30	2.30	2.30	2.30	-	15.57	5.88
		7	7	9	9	9	9	12	-	1.77	1.77	2.28	2.28	2.28	2.28	3.04	-	15.69	5.87
		7	7	9	9	9	9	9	-	1.82	1.82	2.34	2.34	2.34	2.34	2.34	-	15.34	5.89
		7	7	7	9	9	14	-	-	1.77	1.77	1.77	2.28	2.28	2.28	3.54	-	15.69	5.87
		7	7	7	9	9	12	-	-	1.80	1.80	1.80	2.32	2.32	2.32	3.09	-	15.45	5.89
		7	7	7	9	9	9	-	-	1.91	1.91	1.91	2.46	2.46	2.46	2.46	-	15.55	5.90
7		7	7	9	12	12	-	-	1.79	1.79	1.79	2.30	3.07	3.07	3.07	-	15.57	5.88	
7		7	7	9	9	14	-	-	1.80	1.80	1.80	1.80	2.32	2.32	3.60	-	15.45	5.89	
7		7	7	7	9	12	-	-	1.83	1.83	1.83	1.83	2.36	2.36	3.15	-	15.21	5.90	
7		7	7	7	9	9	-	-	1.93	1.93	1.93	1.93	2.49	2.49	2.49	-	15.21	5.90	
7		7	7	7	7	12	14	-	1.79	1.79	1.79	1.79	3.07	3.57	-	-	15.57	5.88	
7		7	7	7	7	12	12	-	1.82	1.82	1.82	1.82	1.82	3.12	3.12	-	15.33	5.89	
7		7	7	7	7	7	9	18	-	1.77	1.77	1.77	1.77	2.28	4.55	-	15.68	5.87	
7		7	7	7	7	7	9	14	-	1.84	1.84	1.84	1.84	2.36	3.67	-	15.21	5.90	
7		7	7	7	7	7	9	12	-	1.92	1.92	1.92	1.92	2.47	3.30	-	15.38	5.90	
7		7	7	7	7	7	9	9	-	1.96	1.96	1.96	1.96	2.53	2.53	-	14.87	5.90	
7		7	7	7	7	7	7	18	-	1.80	1.80	1.80	1.80	1.80	4.63	-	15.45	5.89	
7		7	7	7	7	7	7	14	-	1.92	1.92	1.92	1.92	1.92	3.84	-	15.37	5.90	
7		7	7	7	7	7	7	12	-	1.95	1.95	1.95	1.95	1.95	3.35	-	15.04	5.90	
7		7	7	7	7	7	7	9	-	2.05	2.05	2.05	2.05	2.05	2.64	-	14.94	5.65	
8-unit connection		7	7	7	7	7	7	7	9	2.05	2.05	2.05	2.05	2.05	2.05	2.05	2.05	14.35	5.35
		7	7	7	7	7	7	7	9	1.80	1.80	1.80	1.80	1.80	1.80	2.28	2.28	15.69	5.87
		7	7	7	7	7	7	7	9	1.80	1.80	1.80	1.80	1.80	1.80	2.32	2.32	15.45	5.89
		7	7	7	7	7	7	7	12	1.79	1.79	1.79	1.79	1.79	1.79	3.07	3.07	15.57	5.88
	7	7	7	7	7	7	7	9	1.84	1.84	1.84	1.84	1.84	1.84	2.36	2.36	15.21	5.90	
	7	7	7	7	7	7	7	7	1.92	1.92	1.92	1.92	1.92	1.92	1.92	1.92	15.37	5.90	
	7	7	7	7	7	7	7	7	1.80	1.80	1.80	1.80	1.80	1.80	1.80	1.80	15.45	5.89	
	7	7	7	7	7	7	7	7	1.84	1.84	1.84	1.84	1.84	1.84	1.84	1.84	15.21	5.90	

Note: •Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature)
•Pipe Length: 5 m (Outdoor unit to Branch box), 3 m (Branch box to Indoor unit)
•Height difference: 0 m (Outdoor unit to Indoor unit)
•The values in this table should be used only as a guide. These values are calculated at standard conditions.
To fix your selection of models, select them according to "Model Selection" in the D&T manual.

8-unit Multi-split heating

AOYG45LBT8	Combination of Indoor Unit								Heating Operation										
									Heating Capacity								Total kW	Input power kW	
									Unit 1 kW	Unit 2 kW	Unit 3 kW	Unit 4 kW	Unit 5 kW	Unit 6 kW	Unit 7 kW	Unit 8 kW			
2-unit connection	24	24	-	-	-	-	-	-	7.91	7.91	-	-	-	-	-	-	15.82	5.07	
	18	24	-	-	-	-	-	-	5.86	7.91	-	-	-	-	-	-	13.77	4.21	
	18	18	24	-	-	-	-	-	5.32	5.32	7.18	-	-	-	-	-	17.82	5.98	
	18	18	18	-	-	-	-	-	5.79	5.79	5.79	-	-	-	-	-	17.38	5.43	
	14	24	24	-	-	-	-	-	4.26	7.02	7.02	-	-	-	-	-	18.31	5.98	
	14	18	24	-	-	-	-	-	4.59	5.61	7.57	-	-	-	-	-	17.77	5.70	
	14	18	18	-	-	-	-	-	4.78	5.84	5.84	-	-	-	-	-	16.46	5.11	
	14	14	24	-	-	-	-	-	4.75	4.75	7.82	-	-	-	-	-	17.32	5.23	
	14	14	18	-	-	-	-	-	4.80	4.80	5.86	-	-	-	-	-	15.46	4.75	
	14*1	14*1	14*1	-	-	-	-	-	4.80	4.80	4.80	-	-	-	-	-	14.40	4.21	
	12	24	24	-	-	-	-	-	3.58	7.15	7.15	-	-	-	-	-	17.89	5.98	
	12	18	24	-	-	-	-	-	3.84	5.68	7.67	-	-	-	-	-	17.19	5.43	
	12	18	18	-	-	-	-	-	3.96	5.86	5.86	-	-	-	-	-	15.68	5.07	
	12	14	24	-	-	-	-	-	3.94	4.78	7.87	-	-	-	-	-	16.59	5.11	
	12	14	18	-	-	-	-	-	3.96	4.80	5.86	-	-	-	-	-	14.62	4.46	
	12*1	14*1	14*1	-	-	-	-	-	3.96	4.80	4.80	-	-	-	-	-	13.56	4.00	
3-unit connection	12	12	24	-	-	-	-	-	3.96	3.96	7.91	-	-	-	-	-	15.83	5.07	
	12	12	18	-	-	-	-	-	3.96	3.96	5.86	-	-	-	-	-	13.78	4.21	
	9	24	24	-	-	-	-	-	2.85	7.54	7.54	-	-	-	-	-	17.93	5.87	
	9	18	24	-	-	-	-	-	2.97	5.83	7.87	-	-	-	-	-	16.67	5.16	
	9	18	18	-	-	-	-	-	2.99	5.86	5.86	-	-	-	-	-	14.71	4.60	
	9	14	24	-	-	-	-	-	2.99	4.80	7.91	-	-	-	-	-	15.70	4.91	
	9	14	18	-	-	-	-	-	2.99	4.80	5.86	-	-	-	-	-	13.65	4.10	
	9	12	24	-	-	-	-	-	2.99	3.96	7.91	-	-	-	-	-	14.86	4.60	
	9	12	18	-	-	-	-	-	2.99	3.96	5.86	-	-	-	-	-	12.81	3.90	
	9	9	24	-	-	-	-	-	2.99	2.99	7.91	-	-	-	-	-	13.89	4.21	
	7	24	24	-	-	-	-	-	2.28	7.61	7.61	-	-	-	-	-	17.51	5.56	
	7	18	24	-	-	-	-	-	2.37	5.85	7.90	-	-	-	-	-	16.12	5.08	
	7	18	18	-	-	-	-	-	2.37	5.86	5.86	-	-	-	-	-	14.09	4.33	
	7	14	24	-	-	-	-	-	2.37	4.80	7.91	-	-	-	-	-	15.08	4.60	
	7	14	18	-	-	-	-	-	2.37	4.80	5.86	-	-	-	-	-	13.03	3.90	
	7	12	24	-	-	-	-	-	2.37	3.96	7.91	-	-	-	-	-	14.24	4.33	
	7	9	24	-	-	-	-	-	2.37	2.99	7.91	-	-	-	-	-	13.27	4.00	
	4-unit connection	14	14	14	18	-	-	-	-	4.30	4.30	4.30	5.24	-	-	-	-	18.13	5.98
		14	14	14	14	-	-	-	-	4.55	4.55	4.55	4.55	-	-	-	-	18.20	5.70
		12	14	18	18	-	-	-	-	3.53	4.28	5.22	5.22	-	-	-	-	18.24	5.98
		12	14	14	18	-	-	-	-	3.61	4.38	4.38	5.34	-	-	-	-	17.71	5.98
		12	14	14	14	-	-	-	-	3.80	4.61	4.61	4.61	-	-	-	-	17.62	5.43
		12	12	18	18	-	-	-	-	3.59	3.59	5.32	5.32	-	-	-	-	17.82	5.98
		12	12	14	24	-	-	-	-	3.52	3.52	4.26	7.04	-	-	-	-	18.32	5.98
		12	12	14	18	-	-	-	-	3.79	3.79	4.59	5.61	-	-	-	-	17.77	5.70
		12	12	14	14	-	-	-	-	3.92	3.92	4.75	4.75	-	-	-	-	17.33	5.23
		12	12	12	24	-	-	-	-	3.58	3.58	3.58	7.15	-	-	-	-	17.90	5.98
		12	12	12	18	-	-	-	-	3.84	3.84	3.84	5.68	-	-	-	-	17.20	5.43
		12	12	12	14	-	-	-	-	3.94	3.94	3.94	4.78	-	-	-	-	16.60	5.11
		12	12	12	12	-	-	-	-	3.96	3.96	3.96	3.96	-	-	-	-	15.84	5.07
		9	14	18	18	-	-	-	-	2.72	4.37	5.33	5.33	-	-	-	-	17.76	5.98
		9	14	14	24	-	-	-	-	2.66	4.27	4.27	7.04	-	-	-	-	18.22	5.98
9		14	14	18	-	-	-	-	2.87	4.60	4.60	5.62	-	-	-	-	17.68	5.56	
9		14	14	14	-	-	-	-	2.96	4.75	4.75	4.75	-	-	-	-	17.22	5.16	
9		12	18	18	-	-	-	-	2.86	3.78	5.60	5.60	-	-	-	-	17.84	5.87	
9		12	14	24	-	-	-	-	2.71	3.59	4.35	7.17	-	-	-	-	17.83	5.98	
9		12	14	18	-	-	-	-	2.90	3.85	4.66	5.69	-	-	-	-	17.11	5.32	
9		12	14	14	-	-	-	-	2.98	3.94	4.78	4.78	-	-	-	-	16.48	5.08	
9		12	12	24	-	-	-	-	2.85	3.77	3.77	7.54	-	-	-	-	17.94	5.97	
9		12	12	18	-	-	-	-	2.97	3.94	3.94	5.83	-	-	-	-	16.67	5.16	
9		12	12	14	-	-	-	-	2.99	3.96	3.96	4.80	-	-	-	-	15.71	4.91	
9		12	12	12	-	-	-	-	2.99	3.96	3.96	3.96	-	-	-	-	14.87	4.60	
9		9	18	24	-	-	-	-	2.71	2.71	5.30	7.16	-	-	-	-	17.88	5.98	
9		9	18	18	-	-	-	-	2.90	2.90	5.68	5.68	-	-	-	-	17.17	5.43	
9		9	14	24	-	-	-	-	2.86	2.86	4.58	7.55	-	-	-	-	17.85	5.70	
9		9	14	18	-	-	-	-	2.98	2.98	4.78	5.83	-	-	-	-	16.56	5.11	
9		9	14	14	-	-	-	-	2.99	2.99	4.80	4.80	-	-	-	-	15.58	4.75	
9		9	12	24	-	-	-	-	2.89	2.89	3.83	7.65	-	-	-	-	17.27	5.43	
9		9	12	18	-	-	-	-	2.99	2.99	3.96	5.86	-	-	-	-	15.80	5.07	
9		9	12	14	-	-	-	-	2.99	2.99	3.96	4.80	-	-	-	-	14.74	4.46	
9		9	12	12	-	-	-	-	2.99	2.99	3.96	3.96	-	-	-	-	13.90	4.21	
9		9	9	24	-	-	-	-	2.97	2.97	2.97	7.86	-	-	-	-	16.77	5.16	
9		9	9	18	-	-	-	-	2.99	2.99	2.99	5.86	-	-	-	-	14.83	4.60	
9		9	9	14	-	-	-	-	2.99	2.99	2.99	4.80	-	-	-	-	13.77	4.10	
9		9	9	12	-	-	-	-	2.99	2.99	2.99	3.96	-	-	-	-	12.93	3.90	
7		18	18	18	-	-	-	-	2.14	5.28	5.28	5.28	-	-	-	-	17.98	5.98	
7		14	18	18	-	-	-	-	2.26	4.57	5.58	5.58	-	-	-	-	17.99	5.87	
7		14	14	24	-	-	-	-	2.14	4.33	4.33	7.14	-	-	-	-	17.94	5.98	
7		14	14	18	-	-	-	-	2.29	4.65	4.65	5.67	-	-	-	-	17.26	5.32	
7		14	14	14	-	-	-	-	2.36	4.77	4.77	4.77	-	-	-	-	16.67	5.08	
7		12	18	24	-	-	-	-	2.13	3.56	5.26	7.10	-	-	-	-	18.05	5.98	
7		12	18	18	-	-	-	-	2.29	3.82	5.65	5.65	-	-	-	-	17.41	5.56	
7		12	14	24	-	-	-	-	2.25	3.76	4.56	7.52	-	-	-	-	18.09	5.87	
7		12	14	18	-	-	-	-	2.35	3.93	4.77	5.82	-	-	-	-	16.87	5.16	
7		12	14	14	-	-	-	-	2.37	3.96	4.80	4.80	-	-	-	-	15.93	4.91	
7		12	12	24	-	-	-	-	2.28	3.81	3.81	7.61	-	-	-	-	17.51	5.56	
7		12	12	18	-	-	-	-	2.37	3.96	3.96	5.85	-	-	-	-	16.13	5.08	
7	12	12	14	-	-	-	-	2.37	3.96	3.96	4.80	-	-	-	-	15.09	4.60		
7	12	12	12	-	-	-	-	2.37	3.96	3.96	3.96	-	-	-	-	14.25	4.33		
7	9	18	24	-	-	-	-	2.25	2.84	5.56	7.51	-	-	-	-	18.15	5.98		
7	9	18	18	-	-	-	-	2.35	2.97	5.81	5.81	-	-	-	-	16.95	5.23		
7	9	14	24	-	-	-	-	2.29	2.88	4.63	7.63	-	-	-	-	17.42	5.43		
7	9	14	18	-	-	-	-	2.37	2.99	4.80	5.86	-	-	-	-	16.02	5.07		
7	9	12	24	-	-	-	-	2.35	2.96	3.92	7.84	-	-	-	-	17.08	5.23		
7	9	12	18	-	-	-	-	2.37	2.99	3.96	5.86	-	-	-	-	15.18	4.75		
7	9	12	14	-	-	-	-	2.37	2.99	3.96	4.80	-	-	-	-	14.12	4.21		
7	9	12	12	-	-	-	-	2.37	2.99	3.96	3.96	-	-	-	-	13.28	4.00		
7	9	9	24	-	-	-	-	2.37	2.98	2.98	7.89	-	-	-	-	16.23	5.08		
7	9	9	18	-	-	-	-	2.37	2.99	2.99	5.86	-	-	-	-	14.21	4.33		
7	9	9	14	-	-	-	-	2.37	2.99	2.99	4.80	-	-	-	-	13.15	3.90		
7	7	24	24	-	-	-	-	2.11	2.11	7.03	7.03	-	-	-	-	18.28	5.98		
7	7	18	24	-	-	-	-	2.27	2.27	5.61	7.57	-	-	-	-	17.73	5.70		
7	7	18	18	-	-	-													

8-unit Multi-split Combination Table-Heating

8-unit Multi-split heating

AOYG45LBT8	Combination of Indoor Unit								Heating Operation										Input power
									Heating Capacity								Total		
									Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6	Unit 7	Unit 8		kW	
4-unit connection	7	7	14	18	-	-	-	-	kW	kW	kW	kW	kW	kW	kW	kW	kW		
	7	7	14	18	-	-	-	-	2.37	2.37	4.80	5.86	-	-	-	-	15.40	4.75	
	7	7	14	14	-	-	-	-	2.37	2.37	4.80	4.80	-	-	-	-	14.34	4.21	
	7	7	12	24	-	-	-	-	2.36	2.36	3.94	7.87	-	-	-	-	16.53	5.11	
	7	7	12	18	-	-	-	-	2.37	2.37	3.96	5.86	-	-	-	-	14.56	4.46	
	7	7	12	14	-	-	-	-	2.37	2.37	3.96	4.80	-	-	-	-	13.50	4.00	
	7	7	9	24	-	-	-	-	2.37	2.37	2.99	7.91	-	-	-	-	15.64	4.91	
	7	7	9	18	-	-	-	-	2.37	2.37	2.99	5.86	-	-	-	-	13.59	4.10	
	7	7	9	14	-	-	-	-	2.37	2.37	2.99	4.80	-	-	-	-	15.02	4.60	
	7	7	7	24	-	-	-	-	2.37	2.37	2.37	7.91	-	-	-	-	15.02	4.60	
	7	7	7	18	-	-	-	-	2.37	2.37	2.37	5.86	-	-	-	-	12.97	3.90	
	5-unit connection	12	12	12	12	14	-	-	-	3.51	3.51	3.51	3.51	4.26	-	-	-	18.32	5.98
12		12	12	12	12	-	-	-	3.58	3.58	3.58	3.58	3.58	-	-	-	17.90	5.98	
9		12	12	14	14	-	-	-	2.66	3.52	3.52	4.27	4.27	-	-	-	18.26	5.98	
9		12	12	14	14	-	-	-	2.71	3.59	3.59	3.59	4.35	-	-	-	17.84	5.98	
9		12	12	12	12	-	-	-	2.85	3.77	3.77	3.77	3.77	-	-	-	17.95	5.87	
9		9	14	14	14	-	-	-	2.67	2.67	4.28	4.28	4.28	-	-	-	18.19	5.98	
9		9	12	14	18	-	-	-	2.66	2.66	3.52	4.26	5.21	-	-	-	18.30	5.98	
9		9	12	14	14	-	-	-	2.72	2.72	3.60	4.37	4.37	-	-	-	17.77	5.98	
9		9	12	12	18	-	-	-	2.71	2.71	3.58	3.58	5.30	-	-	-	17.88	5.98	
9		9	12	12	14	-	-	-	2.86	2.86	3.78	3.78	4.58	-	-	-	17.86	5.70	
9		9	12	12	12	-	-	-	2.89	2.89	3.83	3.83	3.83	-	-	-	17.28	5.43	
9		9	9	14	18	-	-	-	2.71	2.71	2.71	4.36	5.32	-	-	-	17.82	5.98	
9	9	9	14	14	-	-	-	2.86	2.86	2.86	4.59	4.59	-	-	-	17.77	5.56		
6-unit connection	9	9	9	12	18	-	-	-	2.85	2.85	2.85	3.78	5.59	-	-	-	17.92	5.87	
	9	9	9	12	14	-	-	-	2.90	2.90	2.90	3.84	4.65	-	-	-	17.19	5.32	
	9	9	9	12	12	-	-	-	2.97	2.97	2.97	3.93	3.93	-	-	-	16.78	5.16	
	9	9	9	9	24	-	-	-	2.70	2.70	2.70	2.70	7.14	-	-	-	17.94	5.98	
	9	9	9	9	18	-	-	-	2.89	2.89	2.89	2.89	5.67	-	-	-	17.25	5.43	
	9	9	9	9	14	-	-	-	2.97	2.97	2.97	2.97	4.77	-	-	-	16.67	5.11	
	9	9	9	9	12	-	-	-	2.99	2.99	2.99	2.99	3.96	-	-	-	15.92	5.07	
	9	9	9	9	9	-	-	-	2.99	2.99	2.99	2.99	2.99	-	-	-	14.95	4.60	
	7	12	14	14	14	-	-	-	2.10	3.51	4.25	4.25	4.25	-	-	-	18.37	5.98	
	7	12	12	14	14	-	-	-	2.14	3.57	3.57	4.33	4.33	-	-	-	17.95	5.98	
	7	12	12	12	18	-	-	-	2.13	3.56	3.56	3.56	5.26	-	-	-	18.06	5.98	
	7	12	12	12	14	-	-	-	2.25	3.76	3.76	3.76	4.56	-	-	-	18.10	5.87	

Feature Summary

Type		Wall Mounted								Cassette		Duct						Floor		Floor/ Ceiling	Ceiling	
Series		Designer Series		Standard Series		Designer Series		Standard Series		Compact 4-way Flow Grid Type Series	Compact 4-way Flow Series	Mini (With drain pump)		Slim (With drain pump)		Medium Static Pressure						
Model No.																						
Refrigerant																						
Energy Saving Function	 Save human sensor	●																				
	 Economy mode	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	 Room temperature set point limitation	○	○	○	○	○	○	○	○	○	○	●	●	○	○	○	○	○	○	○	●	○
	 Set temperature auto return	○	○	○	○	○	○	○	●	○	○	●	●	○	○	○	○	○	○	○	●	○
Comfortable Function	 Power diffuser							●	●													
	 Powerful mode	●	●	●	●	●	●	●	●									●				
	 10°C HEAT operation	●	●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	●	●	●	○	●
	 Low noise mode	●	●	●	●	●	●										(45)(36LMLA)	●			○	(45)(54)(36LRTA)
	 Auto-changeover	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	 Up/down swing flaps	●	●	●	●	●	●		●	●	●	○	○	○	○			●	●		●	
	 Double swing automatic				●			●												●		●
	 Automatic fan speed	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	 Auto restart	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	 Connectable fresh air duct									○	●					●	●				●	●
	 Fresh air intake									○	○			○	○	○	○				○	○
	 Connectable distributing duct															●	●					
Convenient Function	 Auto off timer	○	○	○	○	○	○	○	○		○	○	●	●	○	○	○	○	○	○	○	○
	 Sleep timer	●	●	●	●	●	●	●	●	●	●	○	○	○	○	○	○	●	●	●	○	●
	 Program timer	●	●	●	●	●	●	●	●	●	●	○	○	○	○	○	○	●	●	●	○	●
	 Weekly timer	●	●	○	●	●						●	●					●			●	
	 Weekly + setback timer	○	○	○	○	○	○	○	○	○	○	●		●	●	●	●		○	○		○
	 Filter sign	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	 External error output	○	○	○	○	○	○	○	○			○	○					○			○	
	 External ON/OFF input	○	○	○	○	○	○	○	○	○	○	●	●	○	○	○	○	○	○	○	●	○
Clean Function	 Wireless LAN control	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	 Ion deodorization filter	○	○	○	●	●	●	●										●	●			
	 Apple-catechin filter	○	○	○	●	●	●	●										●	●			
	 Long life filter															○	○	●	●			
Installation	 Washable panel				●			●	●													
	 Drain pump as standard								●	●	●	●	●	●	●	○	○				○	○
Blue fin								● (30)			● (45/54)					● (45)					● (45)	

○ : Optional function